

SONNEMAN®

A WAY
OF
LIGHT

Suspenders®
Catalog

VOL.

6

SONNEMAN®
A WAY OF LIGHT

Suspenders
Catalog
Vol. 6

Table of Contents

Company Overview

About SONNEMAN	6
Our Design Studio	8
Suspenders is...	12
Capabilities & Applications	16

Product Applications

Hospitality	20
Retail & Public Spaces	26
Workspace	30
Wellness & Healthcare	34
Residential	38


Configuration Portfolio

Linear	46
In-Line Linear	48
1-Tier Linear	50
3-Bar In-Line Linear	52
2-Tier Linear	54
5-Bar Offset Linear	56
1-Tier Tri-Bar	58
4-Tier Tri-Bar	60
Single Ring	62
Double Ring	64
Offset Ring	66
2-Bar Offset Ring	68
3-Bar Offset Ring	70
1-Tier Rectangle Path	72
3-Tier Rectangle Path Matrix	74
Path	76
1-Tier Racetrack Path	78
Racetrack Path	80
Z-Curve Path	82
S-Curve Path	84
3-Tier Curve Path Matrix	86
2-Tier Stacked Racetrack Path	88
3-Layer Stacked Racetrack Path	90
2-Tier Tandem	92
2-Tier Grid	94
Gridscape	96
Freeform Tri-Bar	102
Parallels	104
Rainfall	108
3-Bar Ring	110
4-Bar Ring	112
Offset Ring Horizontal Matrix	114
Offset Ring Vertical Matrix	116
4-Tier Gallery Matrix	118
Dual Power Linear	120
Dual Power	122
Mini Single Sconce	124
Bar Sconce	126
2-Bar Wall Mount	128

Luminaires

Double Rod Decorative Luminaires	132
Cluster Luminaires	132
V-Line Luminaires	134
Monoline Luminaires	134
Multi-light Luminaires	134
Bar-Mounted Light Bars	136
Suspended Light Bars	136
Linear Rotational Luminaires	136
Height Adjustable Luminaires	137
Height Adjustable Linear Luminaires	137
Miscellaneous	137
Precise Cylinder Light Engines	138
Power Precise Cylinder Light Engines	140
Power Precise Cube Light Engines	142
Precise Cell Light Engines	142
Precise Sphere Light Engines	142
Light Curve Luminaires	144
Index by Configuration	146





About SONNEMAN

SONNEMAN – A Way of Light designs scalable decorative architectural lighting for statement applications. We are a modern lighting atelier at the intersection of architectural and design innovation. Our brand is built on the pioneering work of Robert Sonneman, who brought European modernist design principles of form and function to the art of lighting. Today, our New York-based design studio, under creative direction of Nuno Pires da Silva, extends the ethos of modern design for contemporary living.

Our minimalist, straightforward, and technically-driven designs are conceived to radiate comfort for a range of residential, hospitality, and commercial spaces. The SONNEMAN collection celebrates lighting as a way of thinking with designs of unparalleled flexibility, detail, and durability. Driven by what's next, we illuminate spaces with architecturally inspired lighting.

Our Design Studio

Our talented creative team collaborates in our new Manhattan studio, where we explore the fusion of innovative design, inventive engineering, and new technologies. Referencing Robert Sonneman's approaches to clean modern design, we embrace the dimensions of light, celebrating geometry, form, and utility. Today, under creative direction of Nuno Pires da Silva, our Design Studio celebrates timeless principles to create cutting-edge lighting.

Our studio is a collaboration space for our diverse team of industrial designers, engineers, project managers, graphic designers, and more. It is together that we create inspired illumination that incorporates different perspectives and skills.

"We are focused on pushing the boundaries of lighting design."

Nuno Pires da Silva



Left: Nuno Pires da Silva, VP - Director of Design
Right: Nicolas Carmichael, VP - Product Management




SONNEMAN Headquarters, Middletown, New York



SONNEMAN Studio, Manhattan, New York



SONNEMAN Showroom at New York Design Center, Manhattan, New York

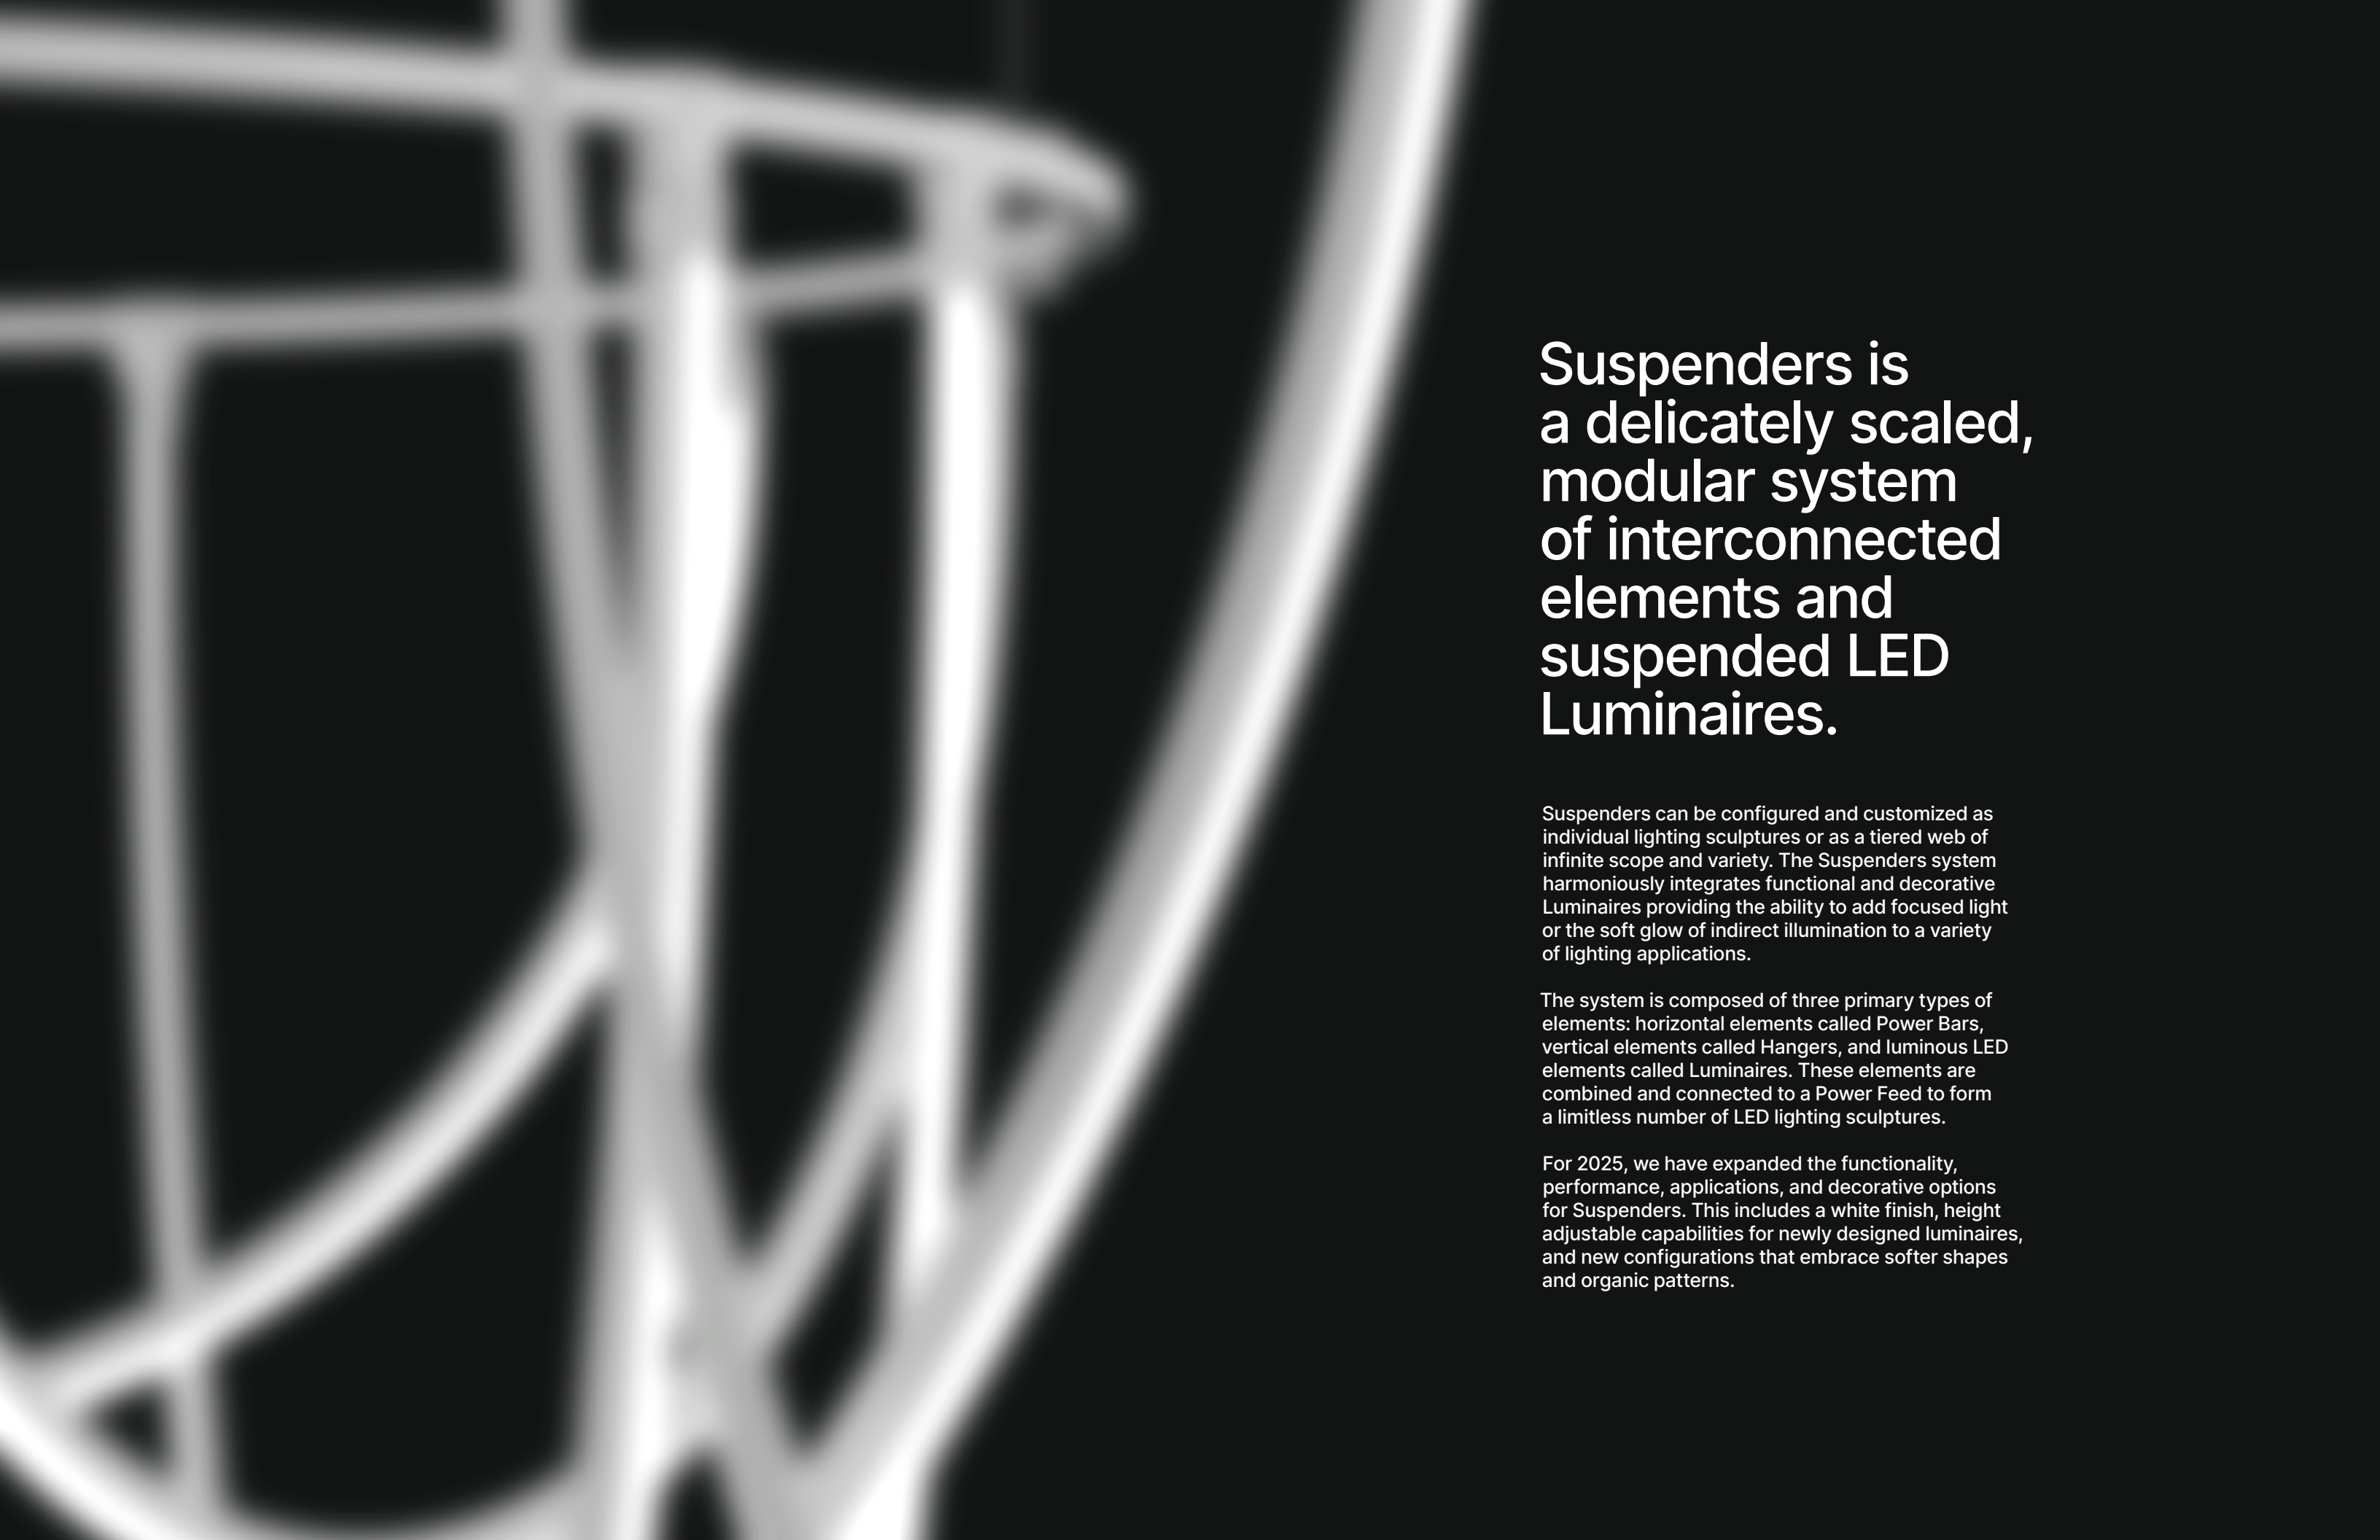

Suspenders is a delicately scaled, modular system of interconnected elements and suspended LED Luminaires.

Suspenders can be configured and customized as individual lighting sculptures or as a tiered web of infinite scope and variety. The Suspenders system harmoniously integrates functional and decorative Luminaires providing the ability to add focused light or the soft glow of indirect illumination to a variety of lighting applications.


The system is composed of three primary types of elements: horizontal elements called Power Bars, vertical elements called Hangers, and luminous LED elements called Luminaires. These elements are combined and connected to a Power Feed to form a limitless number of LED lighting sculptures.

For 2025, we have expanded the functionality, performance, applications, and decorative options for Suspenders. This includes a white finish, height adjustable capabilities for newly designed luminaires, and new configurations that embrace softer shapes and organic patterns.

Suspenders is a System

The Suspenders collection features dozens of possible Power Bar arrangements and Luminaire options. This catalog features several preconfigured options. Hundreds of additional Suspenders Chandeliers, Sconces, and Surface Mounts are available at sonnemanlight.com. Our website features configurators that allow for visualization of hundreds more possible configurations. The possibilities are limitless. Our team has deep expertise in creating Suspenders configurations for every type of space. Visit sonnemanlight.com/suspenders-overview to access our configurators and learn more.

Suspenders makes a statement in residential, hospitality, and commercial spaces. The offering includes our classic Satin Black finish as well as a new softer Satin White finish for many configurations. Our Power Bar styles range from linear and grid configurations to organic shapes such as our new curved path arrangements. And our breadth of Luminaires can provide decorative and ambient or directed and functional lighting. Explore our range of applications.

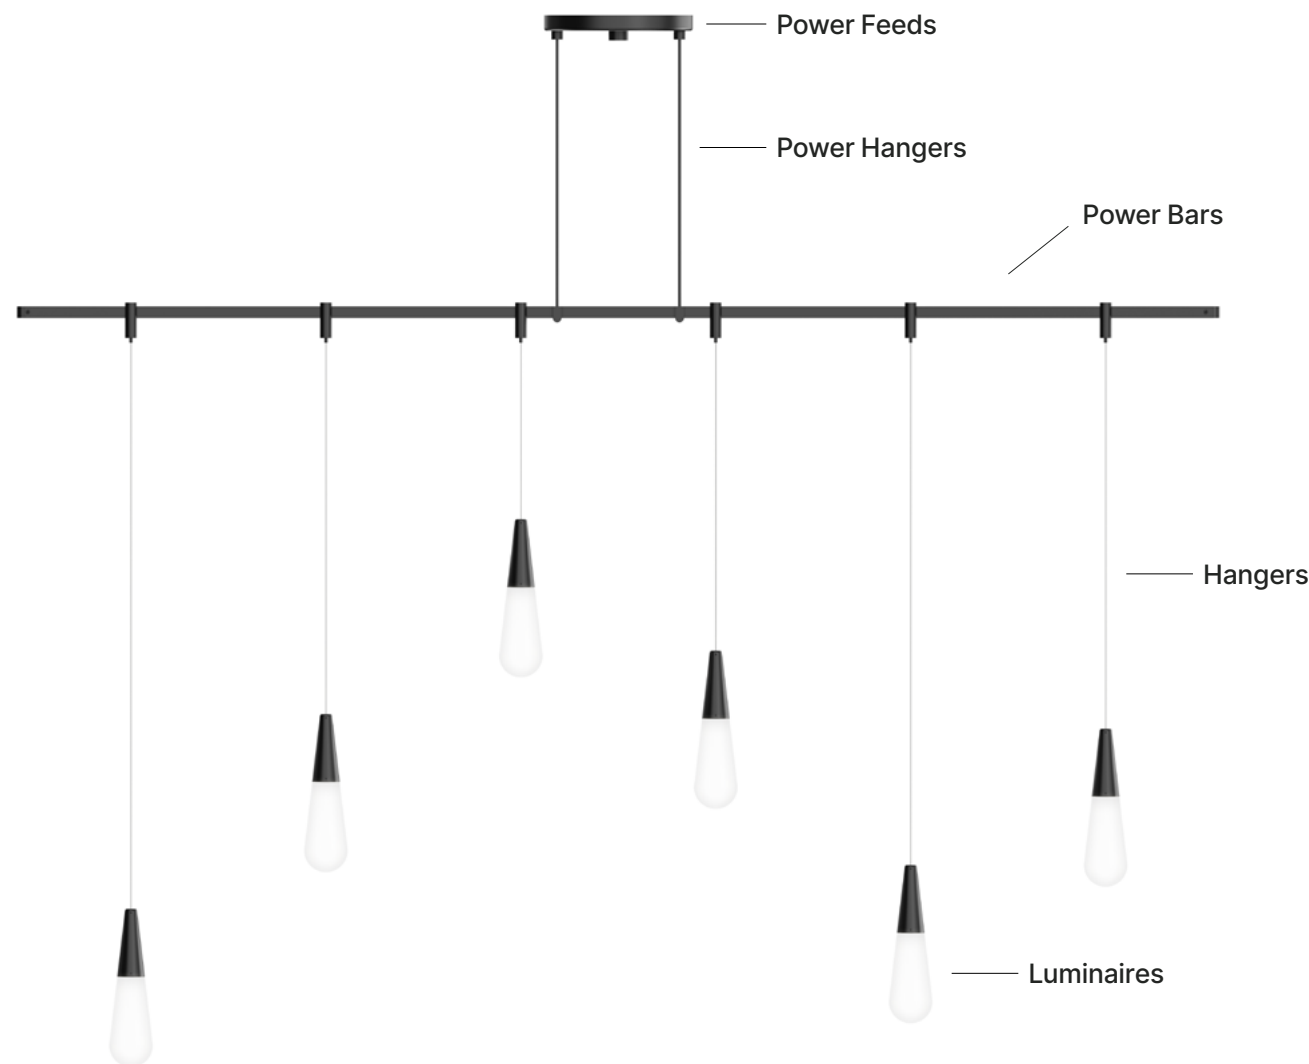

What's New!

We're excited to introduce a range of new lighting solutions designed to enhance both aesthetic and functional spaces. Beginning with a fresh **Satin White** finish, now available across select Luminaires and components, you can achieve a clean, modern look throughout your project.

Our expanded Power Bar capabilities offer greater flexibility and design options. The new **90° Power Bar Connector, Quadrant Power Bar, and Semicircle Power Bar** in various sizes, allow for seamless integration with curved architectural elements.

The revolutionary **Dual Power Bar** doubles the power capacity within the same compact footprint, simplifying installation and providing robust power delivery for complex lighting layouts. These Power Bars are compatible with a wide array of Luminaires.

We've also expanded our Luminaire offerings. Popular legacy Luminaires, such as **Chiclet, Monoline Cylinder and Domed Ball, V-Line Etched Cone, and Mezzaluna** are now available in the new Satin White finish, ensuring a cohesive design language.

The introduction of **Height Adjustable Luminaires** in both black and white, including **Teardrop, Globe, Through Cylinder, Light Tube, and Linear Downlight** options, allows for personalized lighting experiences and adaptable environments. Additionally, the new **Light Curves** in various sizes provide unique textural and dimensional lighting effects.

To further enhance design flexibility, we've introduced a variety of new configuration styles. From dynamic **Path** configurations like **Racetrack** and **Matrix** to elegant **Curve** and **Ring** designs, these styles offer pre-engineered solutions for complex lighting layouts. The innovative **2-Tier** and **3-Tier Stacked** configurations, along with the **Dual Power Linear**, provide even more options for creating impactful and functional lighting designs.

With 40 new preconfigured SKUs that can be customized and two bespoke examples, this catalog provides the tools to bring any vision to life.

Height Adjustable Instructions

Step 1

Insert the cables through the hanger's plunger tubes.



Step 2

Feed the cables through the hanger to set approximate height.



Step 3

Snap the hanger onto the bar at desired position.



Step 4

Set final height: to raise Luminaire, pull up on cables above the hanger. To lower Luminaire, press plunger to release cable. Once height is set, trim excess cable.



Full installation details can be found in our Suspenders Assembly Instructions.



Capabilities & Applications

We are committed to providing our range of commercial, hospitality, and residential clients with lighting that offers unparalleled flexibility, detail, and durability.

Like Suspenders, many of our designs feature a systems approach, including decorative architectural systems that have been designed as individual LED lighting sculptures with the capability to be interconnected into scalable works of art for limitless expansion across the vastness of a space.

Bespoke Projects

We design, develop, and manufacture our products. With our integrated end-to-end team, we bring deep expertise to support clients on tailored and custom lighting projects.

We are proud of the high quality and efficient end-to-end service that we can provide to our clients and partners.

Contact our team to explore SONNEMAN's range of customizable and scalable applications, at: quotes@sonneman.com



Custom Configuration
96" 1-Tier Linear with Branch Luminaires

Designer: Et Interiors Photographer: Shira Brooke
Designer Consult: Consumers Lighting & Lamps



Custom Configuration
2-Tier Grid with Etched Chiclet Luminaire Combo

Designer:
RACAIA Architecture



Custom Configuration
Offset Linear with Chiclet Cluster Luminaires

Designer:
Susan Lin Design



Custom Configuration
Gridscape with Monoline Domed Ball Luminaires

Designer:
Objekt Designs

Hospitality


Designed for the dynamic spaces of hotel rooms, lobbies, reception areas, restaurants, bars, cafes, casinos, and convention centers, Suspenders by SONNEMAN redefines modern lighting with versatility and elegance. This modular system allows for limitless configurations, creating atmospheres that enhance guest experiences while complementing architectural design.

Whether providing a warm glow in an intimate lounge or a striking statement in a grand reception area, Suspenders delivers indirect or precision lighting with sophistication. Elevate your hospitality spaces with innovation and style—crafted for impact, designed for flexibility.





3-Layer Stacked Racetrack Path
→ P. 90

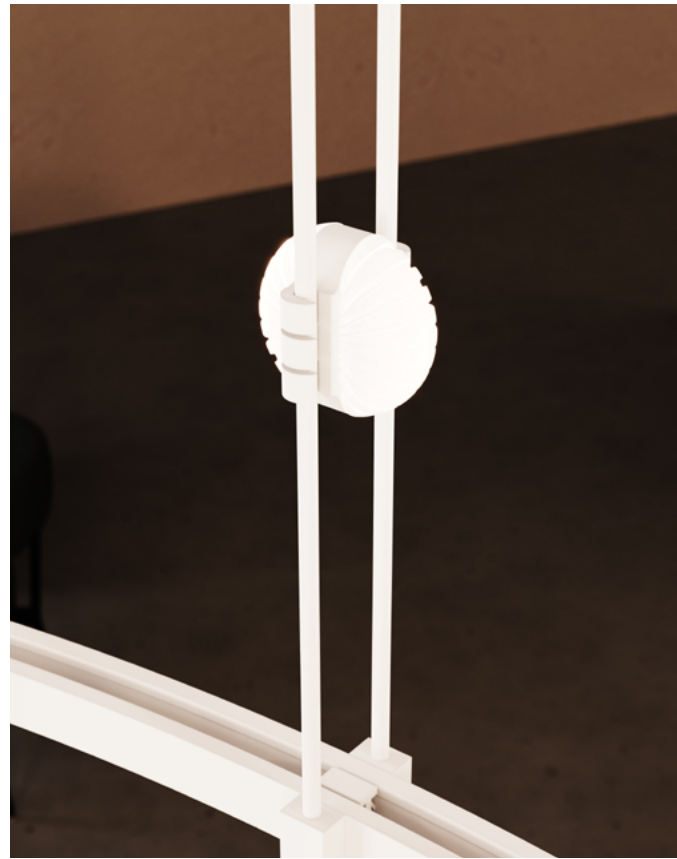

Crystal Ladder Light Luminaire
→ P. 134



Etched Chiclet Luminaire
→ P. 132



Offset Ring Horizontal Matrix
→ P. 114



2-Bar Offset Ring
→ P. 68



2-Tier Stacked Racetrack Path
→ P. 88




Racetrack Path
→ P. 80



Parallels
→ P. 106



Etched Through Cylinder Luminaire
→ P. 137

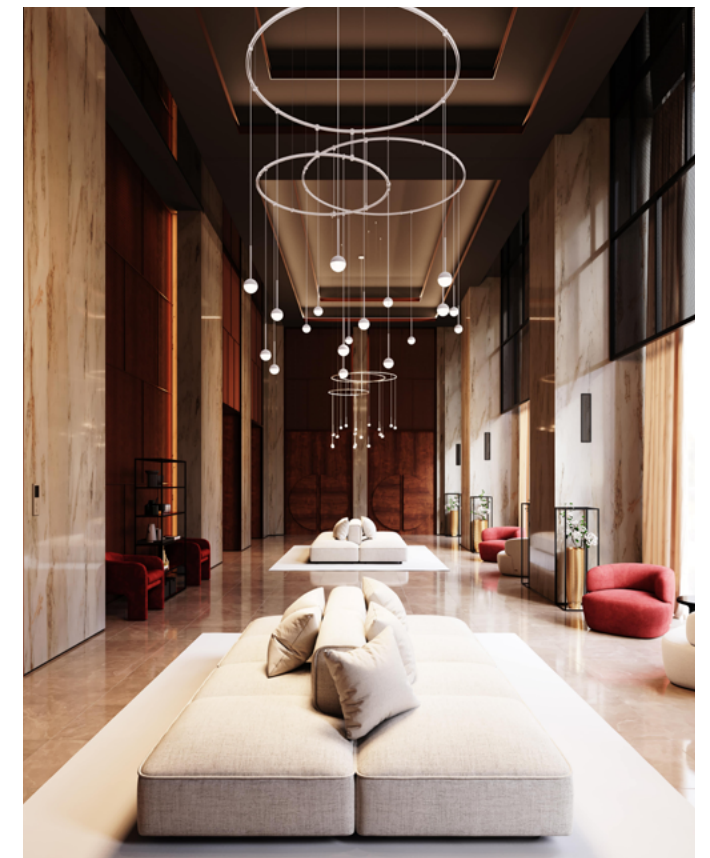


3-Bar Offset Ring
→ P. 70

Retail & Public Spaces

Lighting plays a vital role in shaping both function and atmosphere across libraries, museums, government offices, and retail environments. Suspenders by SONNEMAN offers adaptable, architecturally refined illumination that enhances learning, engagement, efficiency, and customer experience.

In public spaces, this modular system delivers precision and elegance—highlighting exhibits in museums, creating focused reading environments in libraries, and fostering productivity in government offices. In retail settings, Suspenders enhances product displays, sets an inviting ambiance, and adapts to unique aesthetics, from fine jewelry boutiques to high-end fashion stores. Seamlessly integrating into diverse environments, it balances aesthetics with purpose-driven lighting solutions, elevating every space it illuminates.



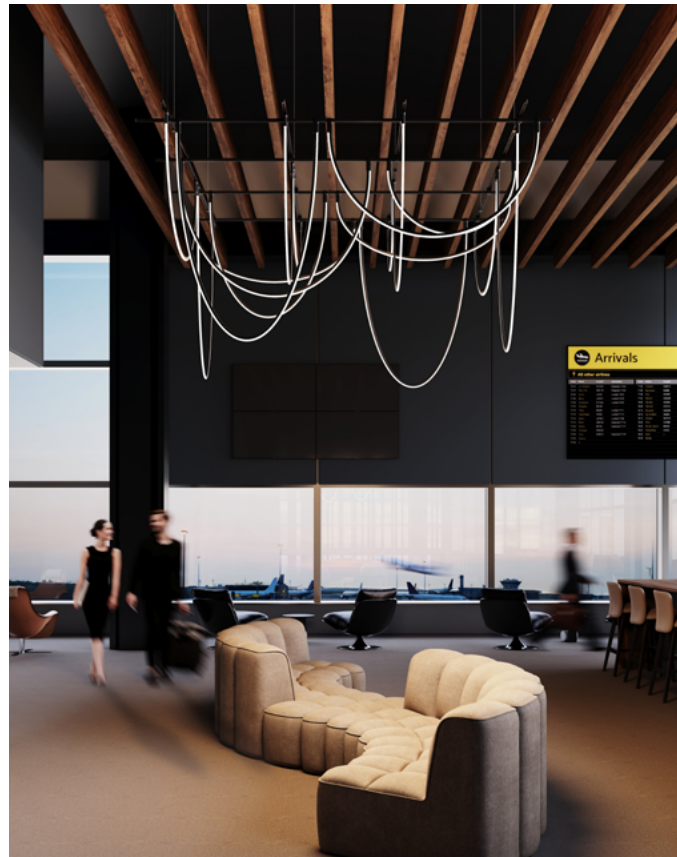

Gridscape
→ P. 100




3-Bar Ring
→ P. 110



Etched Through Cylinder Luminaire
→ P. 137



4-Bar Ring
→ P. 112

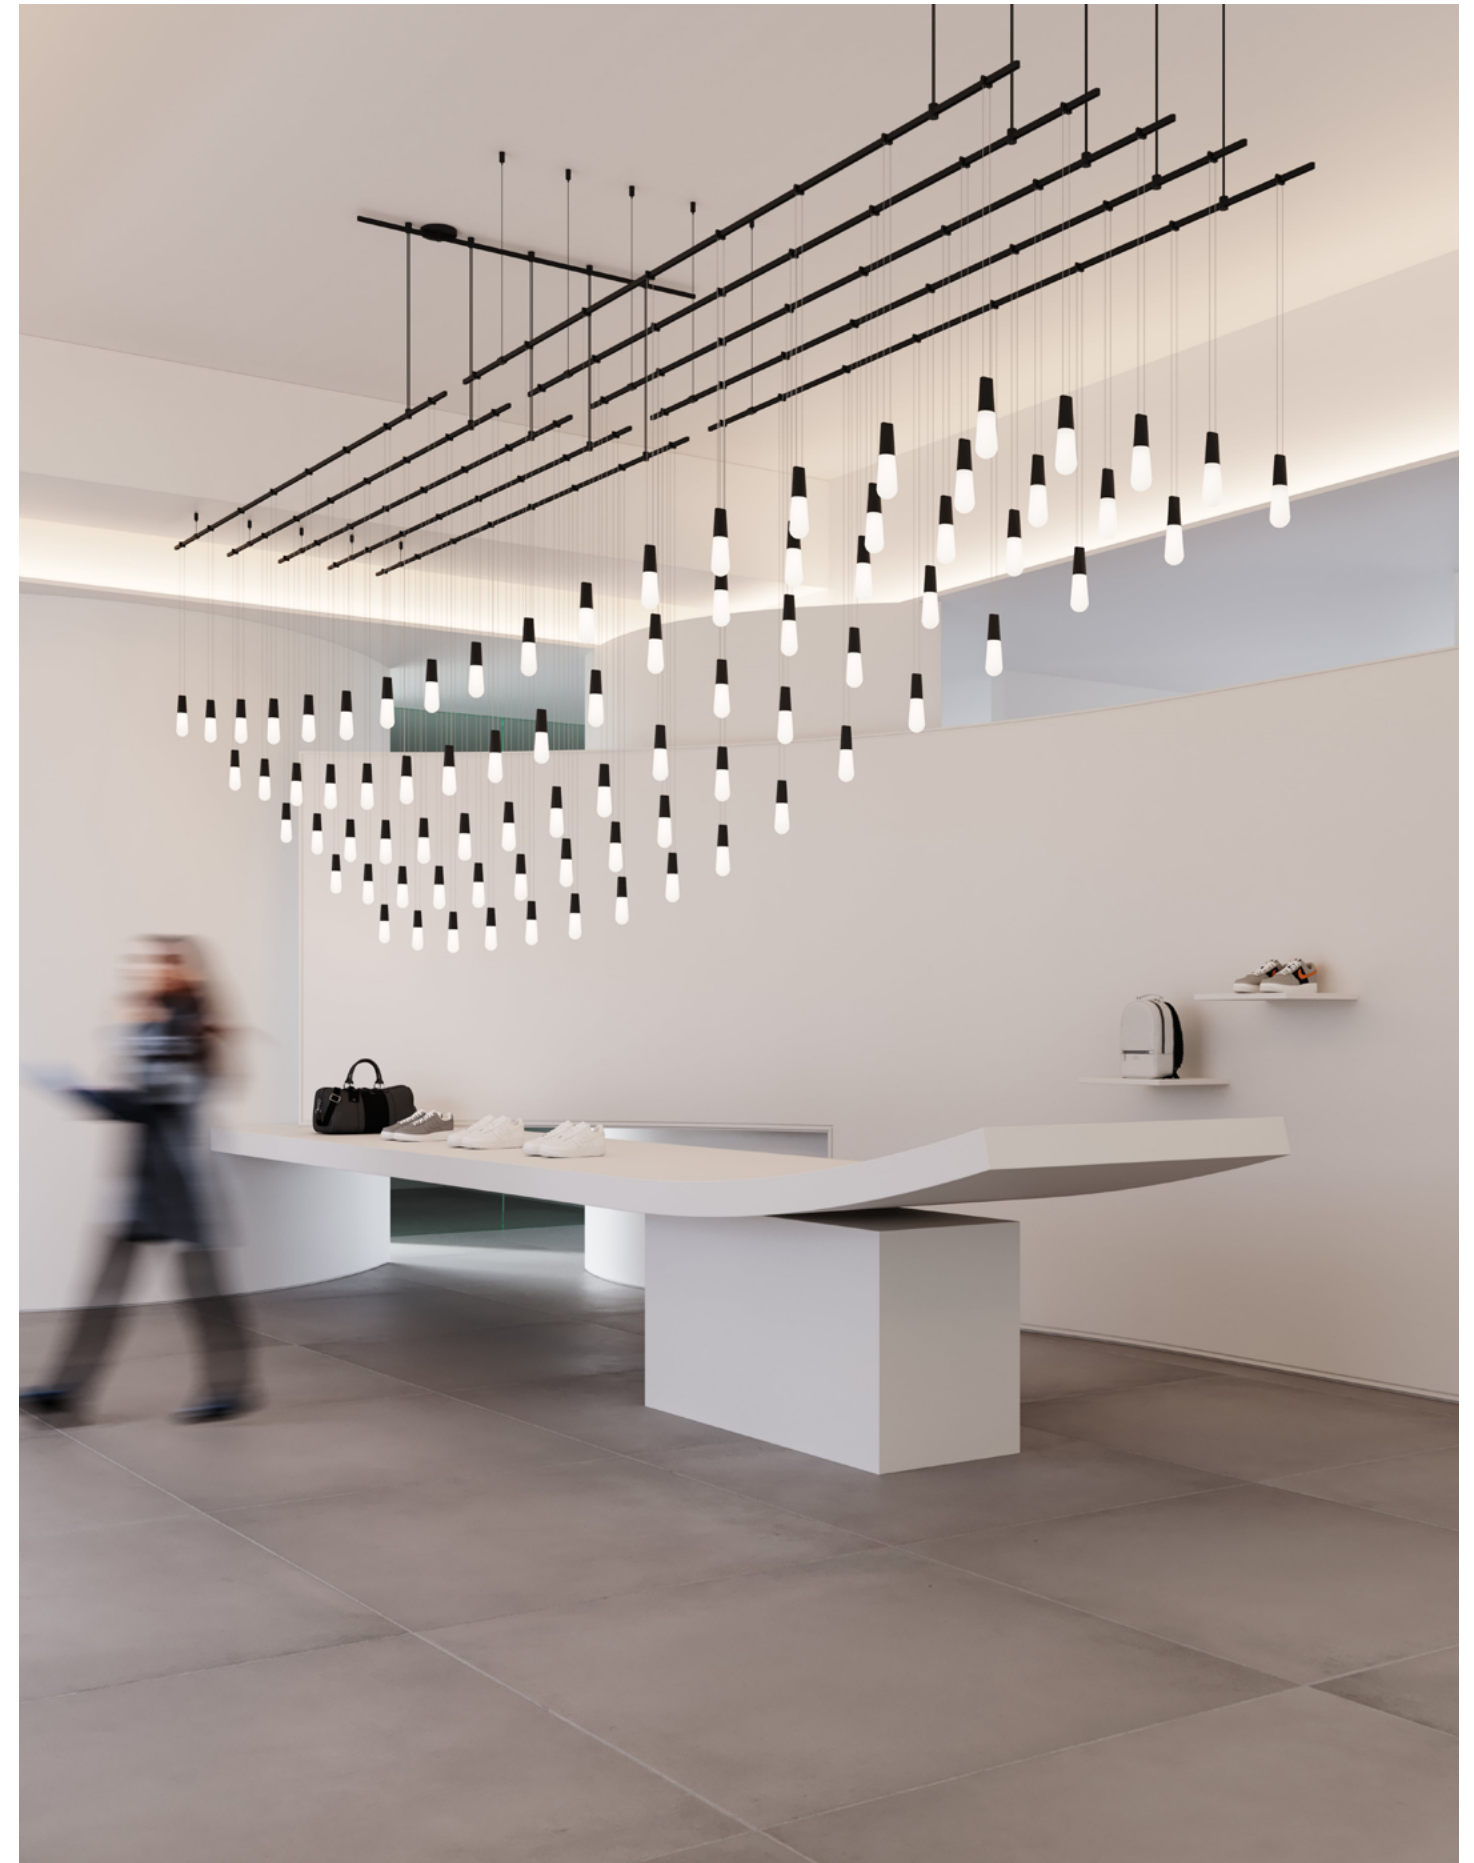

Parallels
→ P. 104

Workspace

In meeting rooms, office spaces, communal areas, and home offices, lighting plays a vital role in fostering focus, collaboration, and comfort. Suspenders by SONNEMAN offers a sleek and adaptable solution, seamlessly integrating into modern work environments.

Whether providing task lighting for individual workstations, enhancing conference rooms with balanced illumination, or adding warmth to shared spaces, this modular system delivers both functionality and style. Create a workspace that inspires productivity and elevates the work experience with precision-engineered lighting.





2-Bar Offset Ring
→ P. 68



1-Tier Rectangle Path
→ P. 72



Monoline Thin Cylinder Luminaire
→ P. 135



Power Precise Bar-Mounted Aimable Cylinder Light Engine with Wide Spot Trim
→ P. 140-141





S-Curve Path
→ P. 84

Wellness & Healthcare

In hospitals, clinics, nursing homes, dental offices, and gyms, lighting plays a crucial role in enhancing comfort, clarity, and well-being. Suspenders by SONNEMAN provides flexible, high-quality lighting solutions that create soothing, functional, and inviting environments.

Whether illuminating patient rooms, offering focused lighting in dental offices, or enhancing the energy of gym spaces, this modular system adapts to the unique needs of healthcare environments. With a focus on both practicality and design, Suspenders brings balance and clarity to spaces where care and wellness are the priority.

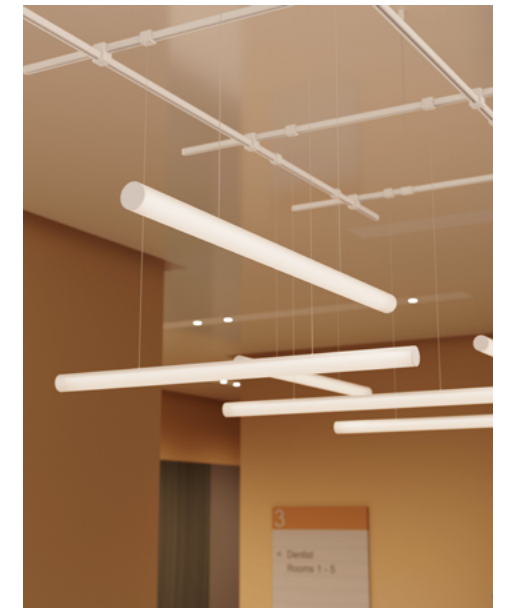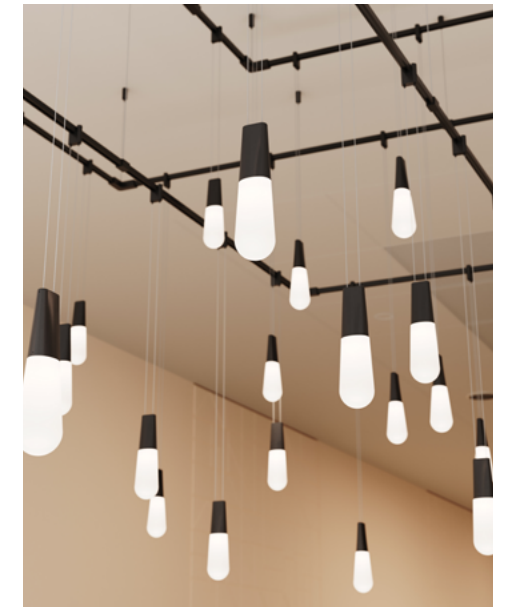



Gridscape
→ P. 96



4-Tier Tri-Bar
→ P. 60

Residential

In single-family homes, multi-family residences, townhouses, apartments, and condos, lighting is essential for creating a welcoming, functional, and stylish atmosphere. Suspenders by SONNEMAN offers versatile lighting solutions that seamlessly integrate into any residential setting.

Whether illuminating open living areas, highlighting architectural features, or providing warm ambiance for cozy bedrooms, this modular system delivers both beauty and practicality. Elevate your living space with lighting that complements your home's design and enhances everyday comfort.





Bar Sconce
→ P. 126



Single Ring
→ P. 62



Linear
→ P. 46



Gridscape
→ P. 98



1-Tier Tri-Bar
→ P. 58



Offset Ring Vertical Matrix
→ P. 116



1-Tier Racetrack Path
→ P. 78



Configuration Styles

Our Power Bar styles range from linear and grid patterns to organic shapes such as our new curved path arrangements. The collection includes Suspended, Wall, and Ceiling Flush Mount configurations. These are available in multiple sizes and finishes. Luminaire options as well as electrical specifications can be further customized. Contact quotes@sonneman.com for assistance.

This catalog features several preconfigured options. Explore these best-selling configurations and new models. Additional options are available at sonnemanlight.com. Each of these SKUs are available to be specified as shown, or can be used as inspiration and customized for your next project.

Linear

A single linear Power Bar, surface-mounted, accents a space with a clean, minimal structure. Here Bar-Mounted Aimable Precise Cylinders provide targeted illumination.

SLS4572-K48-RH01FL

Description:	48" Linear Ceiling Flush Mount
Dimensions:	4 1/2"H x 48 1/2"W x 3 1/2"D
Power Feed:	ø4 1/2" Ceiling Flush Mount Standard Power Feed
Luminaire:	(4) Precise Aimable Cylinders with Flood Lens Trim (P. 138-139) Wattage: 18W, Lumens: 1120lm, CCT: 3000K, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



(3) SLS4802-W96-CH09WS



In-Line Linear

Connected end-to-end and surface mounted, multiple Power Bars create long, linear runs. Direct-mounted Power Precise Cylinders provide robust illumination in a compact form.

SLS4802-W96-CH09WS

Description:	96" 2-Bar In-Line Linear Ceiling Flush Mount
Dimensions:	2 1/2"H x 193 1/2"W x 2 1/4"D
Power Feed:	ø4 1/2" Ceiling Flush Mount Standard Power Feed
Luminaire:	(10) Power Precise Direct Mount Cylinder Light Engines with Wide Spot Trim (P. 140) Wattage: 80W, Lumens: 4900lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



1-Tier Linear

A suspended Linear Power Bar is shown here with Monoline Domed Ball Luminaires, creating a striking visual rhythm along its length.

SLS4573-W72-CL06

Description:	72" 1-Tier Linear
Dimensions:	44 1/2"H x 72 1/2" W x 2 1/2"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	46"-118"
Luminaire:	(6) Monoline Domed Ball 36" (P. 134) Wattage: 14W, Lumens: 960lm, CCT: 3000K, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





3-Bar In-Line Linear

A series of suspended Power Bars are connected end-to-end to create long, linear runs. Shown here, Etched Chiclet Luminaires in a regular rhythm provide bright but approachable light.

SLS4807-K48-RP02

Description:	48" 3-Bar In-Line Linear
Dimensions:	15 1/4"H x 146 1/4"W x 1 1/2"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	17"-88"
Luminaire:	(8) Etched Chiclet Luminaires (P. 132) Wattage: 13W, Lumens 920lm, CCT: 3000K, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)




2-Tier Linear

Two Power Bars in vertical suspension offer visual presence with minimalist structure. Shown with Height Adjustable Etched Globe Luminaires that allow dynamic positioning at the time of installation for infinitely variable compositions.

SLS4574-K96-HA04

Description:	96" 2-Tier Linear
Dimensions:	62"H (as shown) × 96 ½"W × 4 ½"D
Power Feed:	ø6" Shallow Linear Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	24"-318"
Luminaire:	(8) Height Adjustable Etched Globe Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 44W, Lumens 4840lm, CCT: 3000K, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)

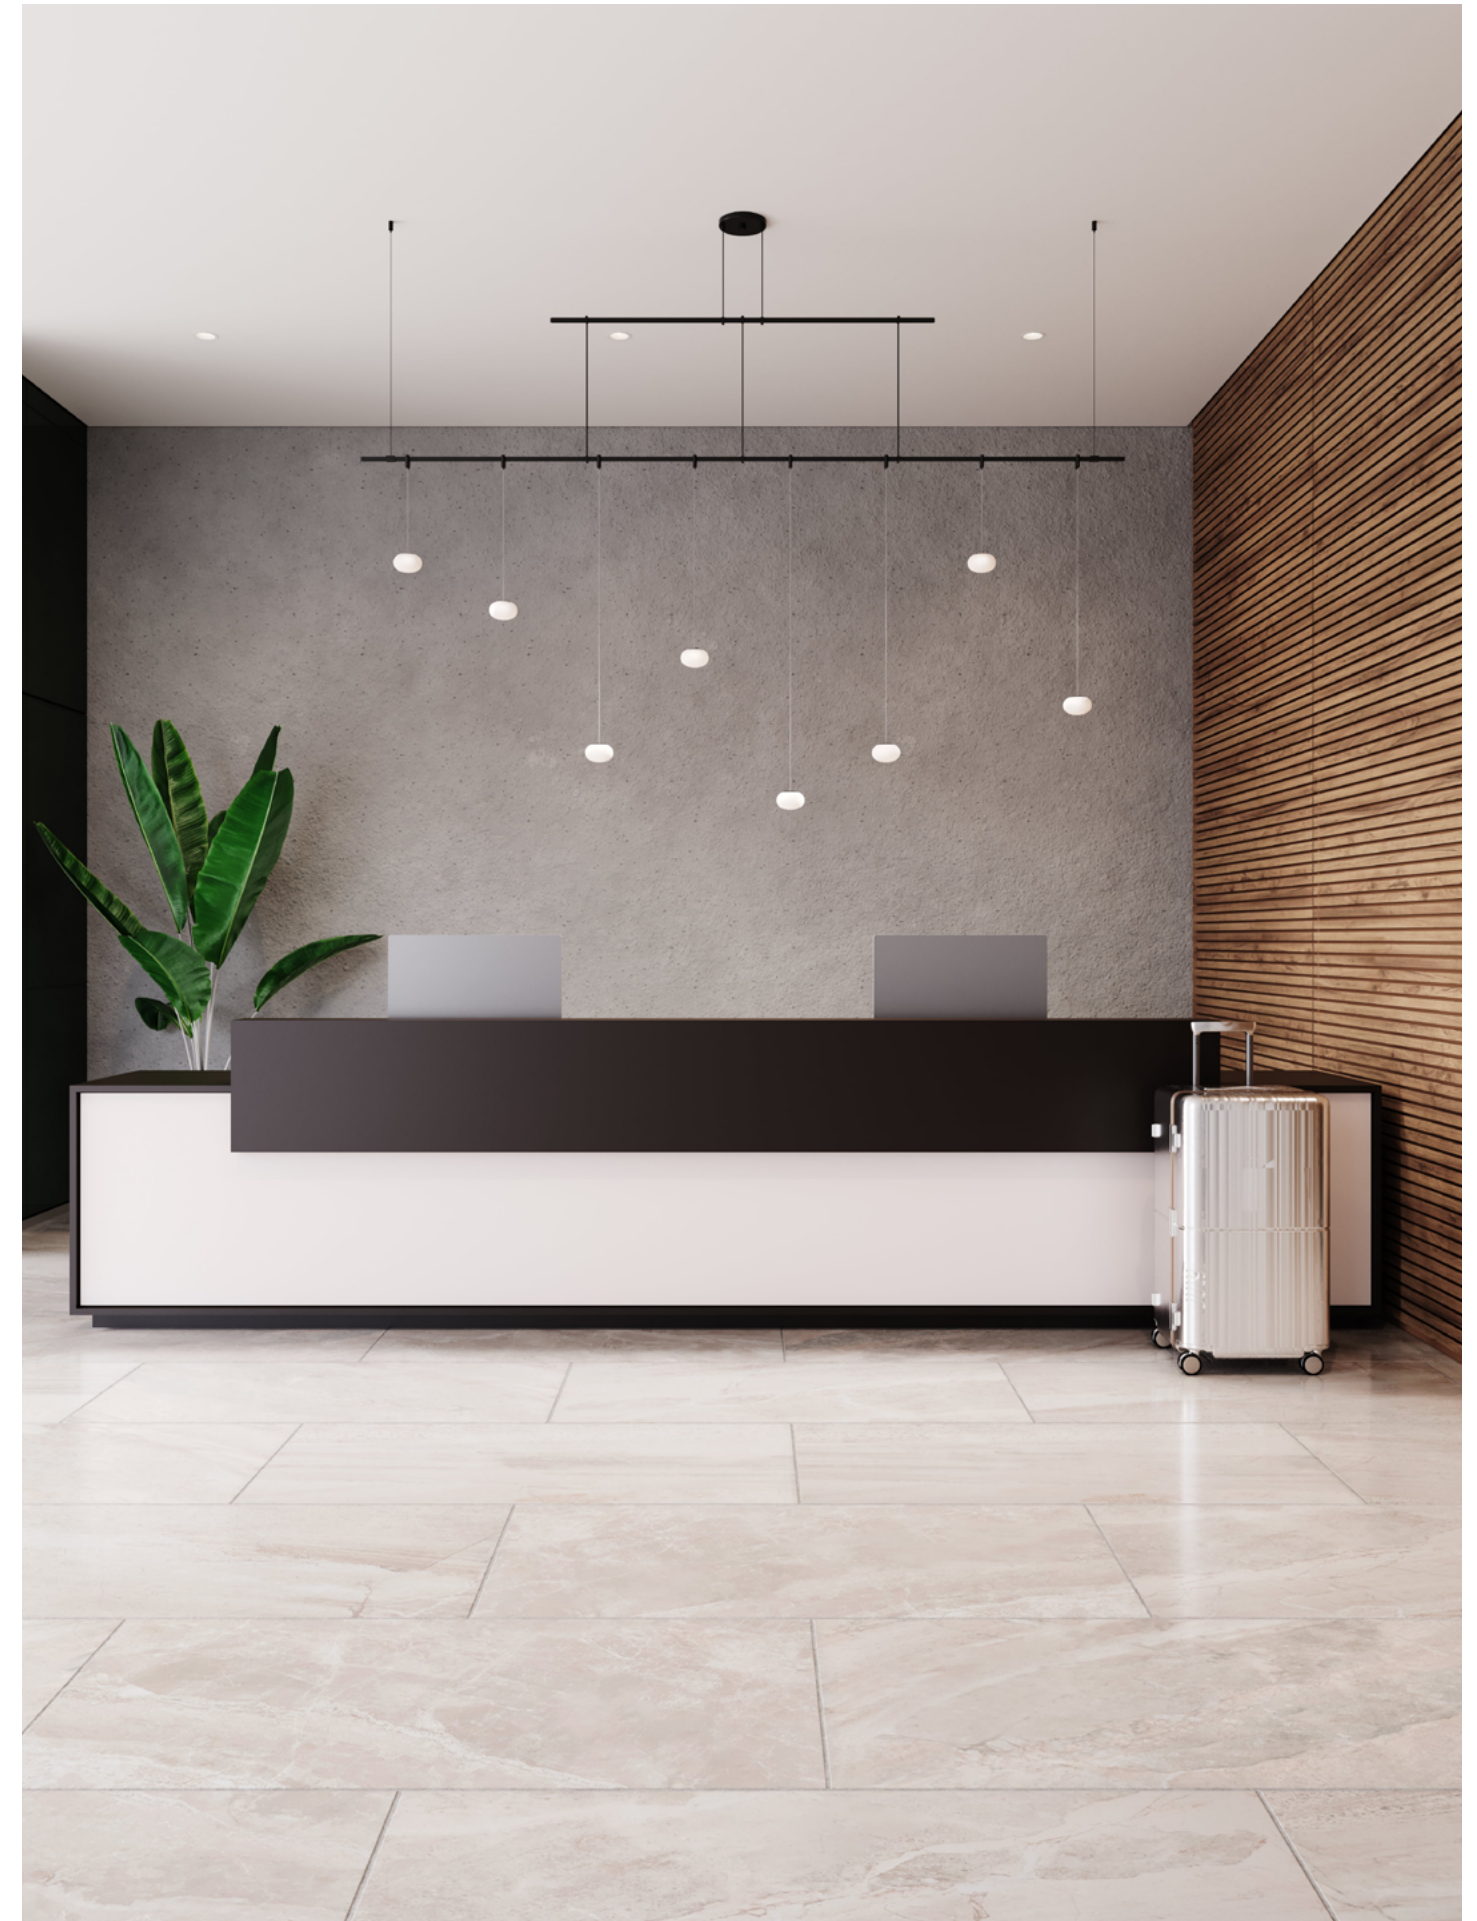



5-Bar Offset Linear

Two levels of Power Bars alternate along a linear path, balancing geometric simplicity with compositional sophistication. Height Adjustable Through Cylinder Luminaires hang at variable heights in groups of up to three.

SLS4801-W48-HA05

Description:	48" 5-Bar Offset Linear
Dimensions:	46"H (as shown) × 229 3/4"W × 2"D
Power Feed:	ø5" Shallow Single Double Power Feed w/Field-Cuttable Cord/Cable Hangers
Hanging Height:	25"-329"
Luminaire:	(39) Height Adjustable Etched Through Cylinder Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 164W, Lumens: 17160lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120-277VAC input, 0-10V dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



1-Tier Tri-Bar

Tri-Bar Power Bars consist of three evenly-spaced bars extending from a central hub. Shown here, Ladder Lights create rhythm and depth along each arm with small yet bright LED modules arranged in vertical drops.

SLS4810-K24-LL01

Description:	24" 1-Tier Tri-Bar
Dimensions:	ø25 ½" x 18 ½"H
Power Feed:	ø6 ½" Shallow Tri-Bar Double Power Feed w/6' Field-Cuttable Cord Hangers
Hanging Height:	20"-91"
Luminaire:	(24) Crystal Ladder Light Luminaires (P. 134) Wattage: 24W, Lumens: 1440lm, CCT: 3000K, CRI 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





4-Tier Tri-Bar

Three linear Power Bars are suspended below the branching Tri-Bar, creating a large-scale tiered structure. Shown with Chiclet Luminaires for soft but powerful LED illumination.

SLS4811-W36-RP30

Description:	36" 4-Tier Tri-Bar
Dimensions:	ø49" x 33"H
Power Feed:	ø6 ½" Shallow Tri-Bar Double Power Feed w/6' Field-Cuttable Cord Hangers
Hanging Height:	34"-106"
Luminaire:	(15) Etched Smooth Chiclet Luminaires (P. 132) Wattage: 24W, Lumens: 1725lm, CCT: 3000K, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



Single Ring

A circular Power Bar supports Luminaires around its perimeter. Shown with Height Adjustable Clear Teardrop Luminaires that can be set at any height during installation, allowing for endless compositional possibilities.

SLS4812-K40-HA02

Description:	40" Single Ring
Dimensions:	ø42" x 41"H (as shown)
Power Feed:	ø6 1/2" Shallow Single Ring Power Feed w/20' Adjustable Cord/Cable Hangers
Hanging Height:	30"-489"
Luminaire:	(15) Height Adjustable Clear Teardrop Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 45W, Lumens: 4125lm, CCT: 3000K, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





Double Ring

Two concentric rings are suspended from a single central Power Feed. Shown with Light Curve Luminaires that seem to drape effortlessly from the Power Bars, creating soft, diffused illumination in an elegant, decorative composition.

SLS4813-W38-LC

Description:	32"/48" Double Ring
Dimensions:	ø49" x 62 3/4"H (as shown)
Power Feed:	ø8" Double Ring Power Feed w/20' Field Cuttable Cord/Cable Hangers
Hanging Height:	63"-278"
Luminaire:	(9) Light Curve Luminaires (P. 144-145) Wattage: 96W, Lumens: 10570lm, CCT: 3000K, CRI:90
Driver:	Power Feed, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



Offset Ring

Monoline Domed Ball Luminaires create functional illumination when suspended from a single circular Power Bar. This versatile Power Bar style pairs well with a number of our modular Luminaire options.

SLS4814-K32-CL06

Description:	32" Offset Ring
Dimensions:	ø34 ½" × 44 ½"H
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	46"-117"
Luminaire:	(12) Monoline™ Domed Ball 36" Luminaires (P. 134) Wattage: 28W, Lumens: 1920lm, CCT: 3000k, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



(3) SLS4815-K30-HA07



2-Bar Offset Ring

Two offset rings fill horizontal and vertical space with minimal structure. Shown with Height Adjustable Light Tube Luminaires that can be installed at a range of heights and angles for a customizable geometric configuration.

SLS4815-K30-HA07

Description:	32"/40" 2-Bar Offset Ring
Dimensions:	73"H (as shown) × 70"W × 46"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	16"-315"
Luminaire:	(10) Height Adjustable 24" Light Tube Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 200W, Lumens: 12300lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120-277VAC input, 0-10V dimmable
Finish:	● Satin Black (K) ○ Satin White (W)




3-Bar Offset Ring

Three circular Power Bars hang in a dynamic offset arrangement that defines a large, airy space. Shown with Monoline Domed Ball Luminaires providing bright and elegant illumination.

SLS4816-W02-CL06

Description:	32"/40"/48" 3-Bar Offset Ring
Dimensions:	62 1/2"H x 115 3/4"W x 50"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	64"-100"
Luminaire:	(18) Monoline™ Domed Ball 36" Luminaires (P. 134) Wattage: 41W, Lumens: 2880lm, CCT: 3000K, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)

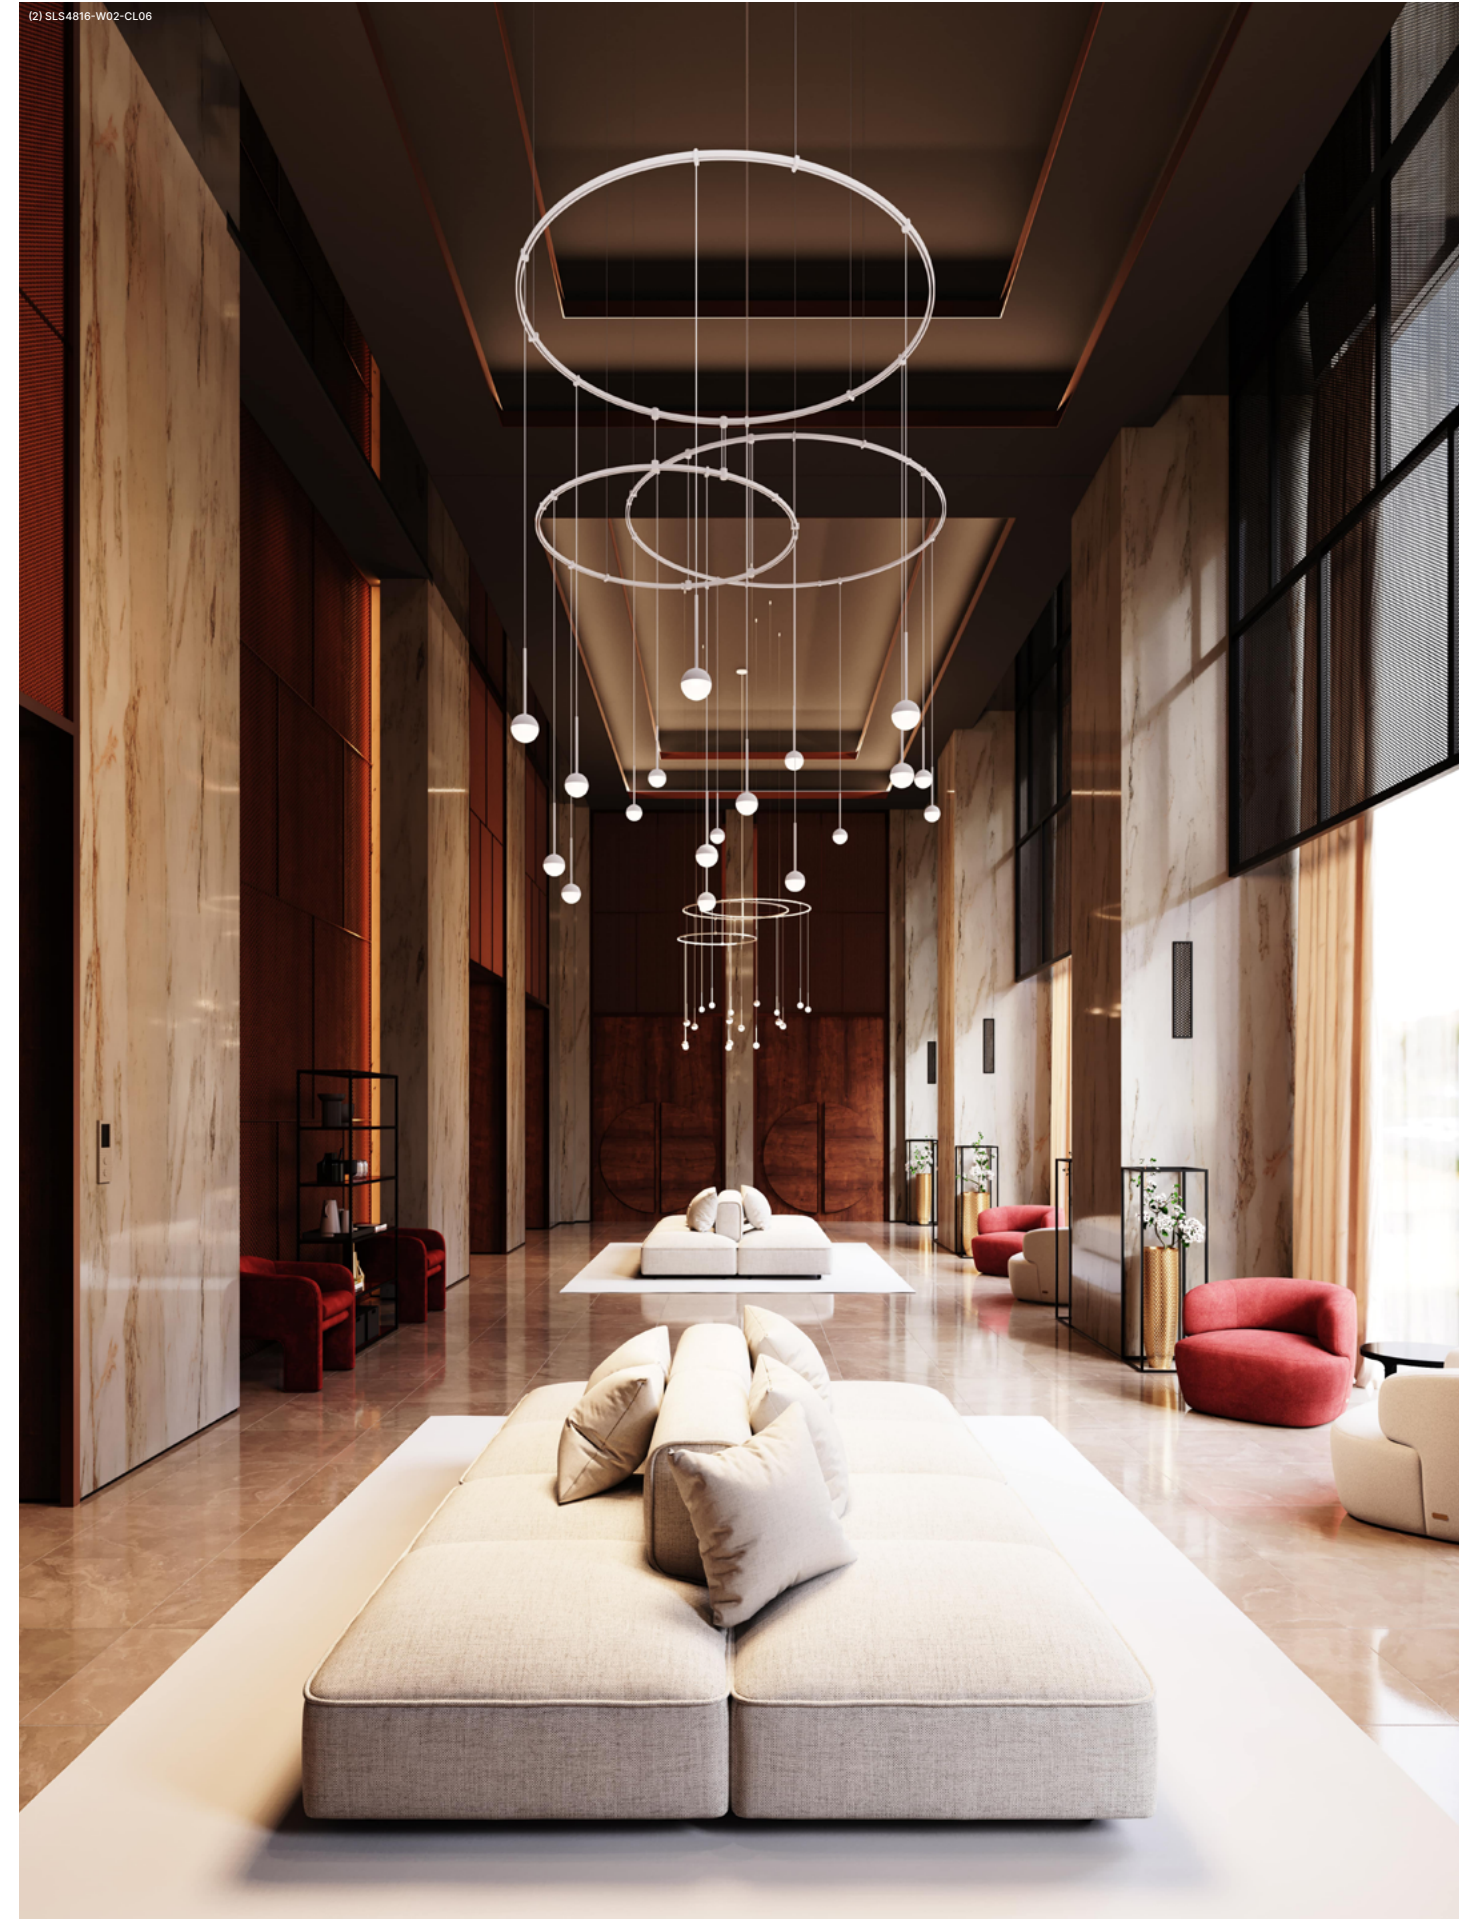



1-Tier Rectangle Path

A minimalist rectangular frame suspends Monoline Thin Cylinder Luminaires, providing bright and even illumination along a modern path.

SLS4817-K05-CL11

Description:	12' x 4' 1-Tier Rectangle Path
Dimensions:	25 1/2"H x 74 1/2"W x 26 1/2"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	27"-99"
Luminaire:	(16) Monoline™ Thin Cylinder 18" Luminaires (P. 135) Wattage: 32W, Lumens: 2400lm, CCT: 3000K, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



3-Tier Rectangle Path Matrix

Three rectangular frames hang in a tiered configuration, defining grand spaces with structured, minimal forms. Shown with Height Adjustable Etched Teardrop Luminaires that can be positioned at varying heights during installation.

SLS4819-K02-HA01

Description:	3-Tier Rectangle Path Matrix
Dimensions:	49"H (as shown) × 119"W × 84"D
Power Feed:	(3) ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	28"-321"
Luminaire:	(58) Height Adjustable Etched Teardrop Luminaires w/20' Field-Cuttable Cable Hangers (P. 137) Wattage: 174W, Lumens: 15950lm, CCT: 3000K, CRI: 90
Driver:	(3) Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





Path

Power Bars connected with In-Line and Corner Connectors create an illuminated path that can be tailored to any space. Aimable and Direct Mount Power Precise Cylinders provide bright, functional illumination.

Custom Configuration Shown

Luminaire:	Power Precise Bar-Mounted Aimable and Direct Mount Cylinder Light Engines w/38° Wide Spot Trims (P. 140)
Finish:	● Satin Black (K) ○ Satin White (W)



1-Tier Racetrack Path

New curved Power Bars allow Suspenders to take new shapes. Height Adjustable Through Cylinder Luminaires, shown here, are suspended singly or in multiples from a single set of cables.

SLS4821-K10-HA05

Description:	76" x 40" 1-Tier Racetrack Path
Dimensions:	40"H (as shown) x 80"W x 42" D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	13"-317"
Luminaire:	(15) Height Adjustable Etched Through Cylinder Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 63W, Lumens: 6600lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



(2) SLS4820-K10-RH03WS



Racetrack Path

This sleek ceiling-mounted loop of Power Bars is shown paired with Power Precise Bar-Mounted Aimable Cylinders for easily adjustable directional illumination.

SLS4820-K10-RH03WS

Description:	76" x 40" Racetrack Path Ceiling Flush Mount
Dimensions:	4 1/2"H x 82"W x 45"D
Power Feed:	ø4 1/2" Ceiling Flush Mount Standard Power Feed
Luminaire:	(9) Power Precise Bar-Mounted Aimable Cylinder Light Engines with Wide Spot Trim (P. 140) Wattage: 72W, Lumens: 4410lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)




Z-Curve Path

A fluid, organic form constructed from curved Power Bars is a bold yet minimal graphic statement when ceiling-mounted. Shown with Monoline Thin Cylinders that introduce striking verticality and deliver functional illumination.

SLS4831-W01-CL11

Description:	Z-Curve Path Ceiling Flush Mount
Dimensions:	55 ½"H × 77"W × 30"D
Power Feed:	ø4 ½" Ceiling Flush Mount Standard Power Feed
Luminaire:	(11) Monoline™ Thin Cylinder 48" Luminaires (P. 135) Wattage: 22W, Lumens: 1650lm, CCT: 3000K, CRI 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)

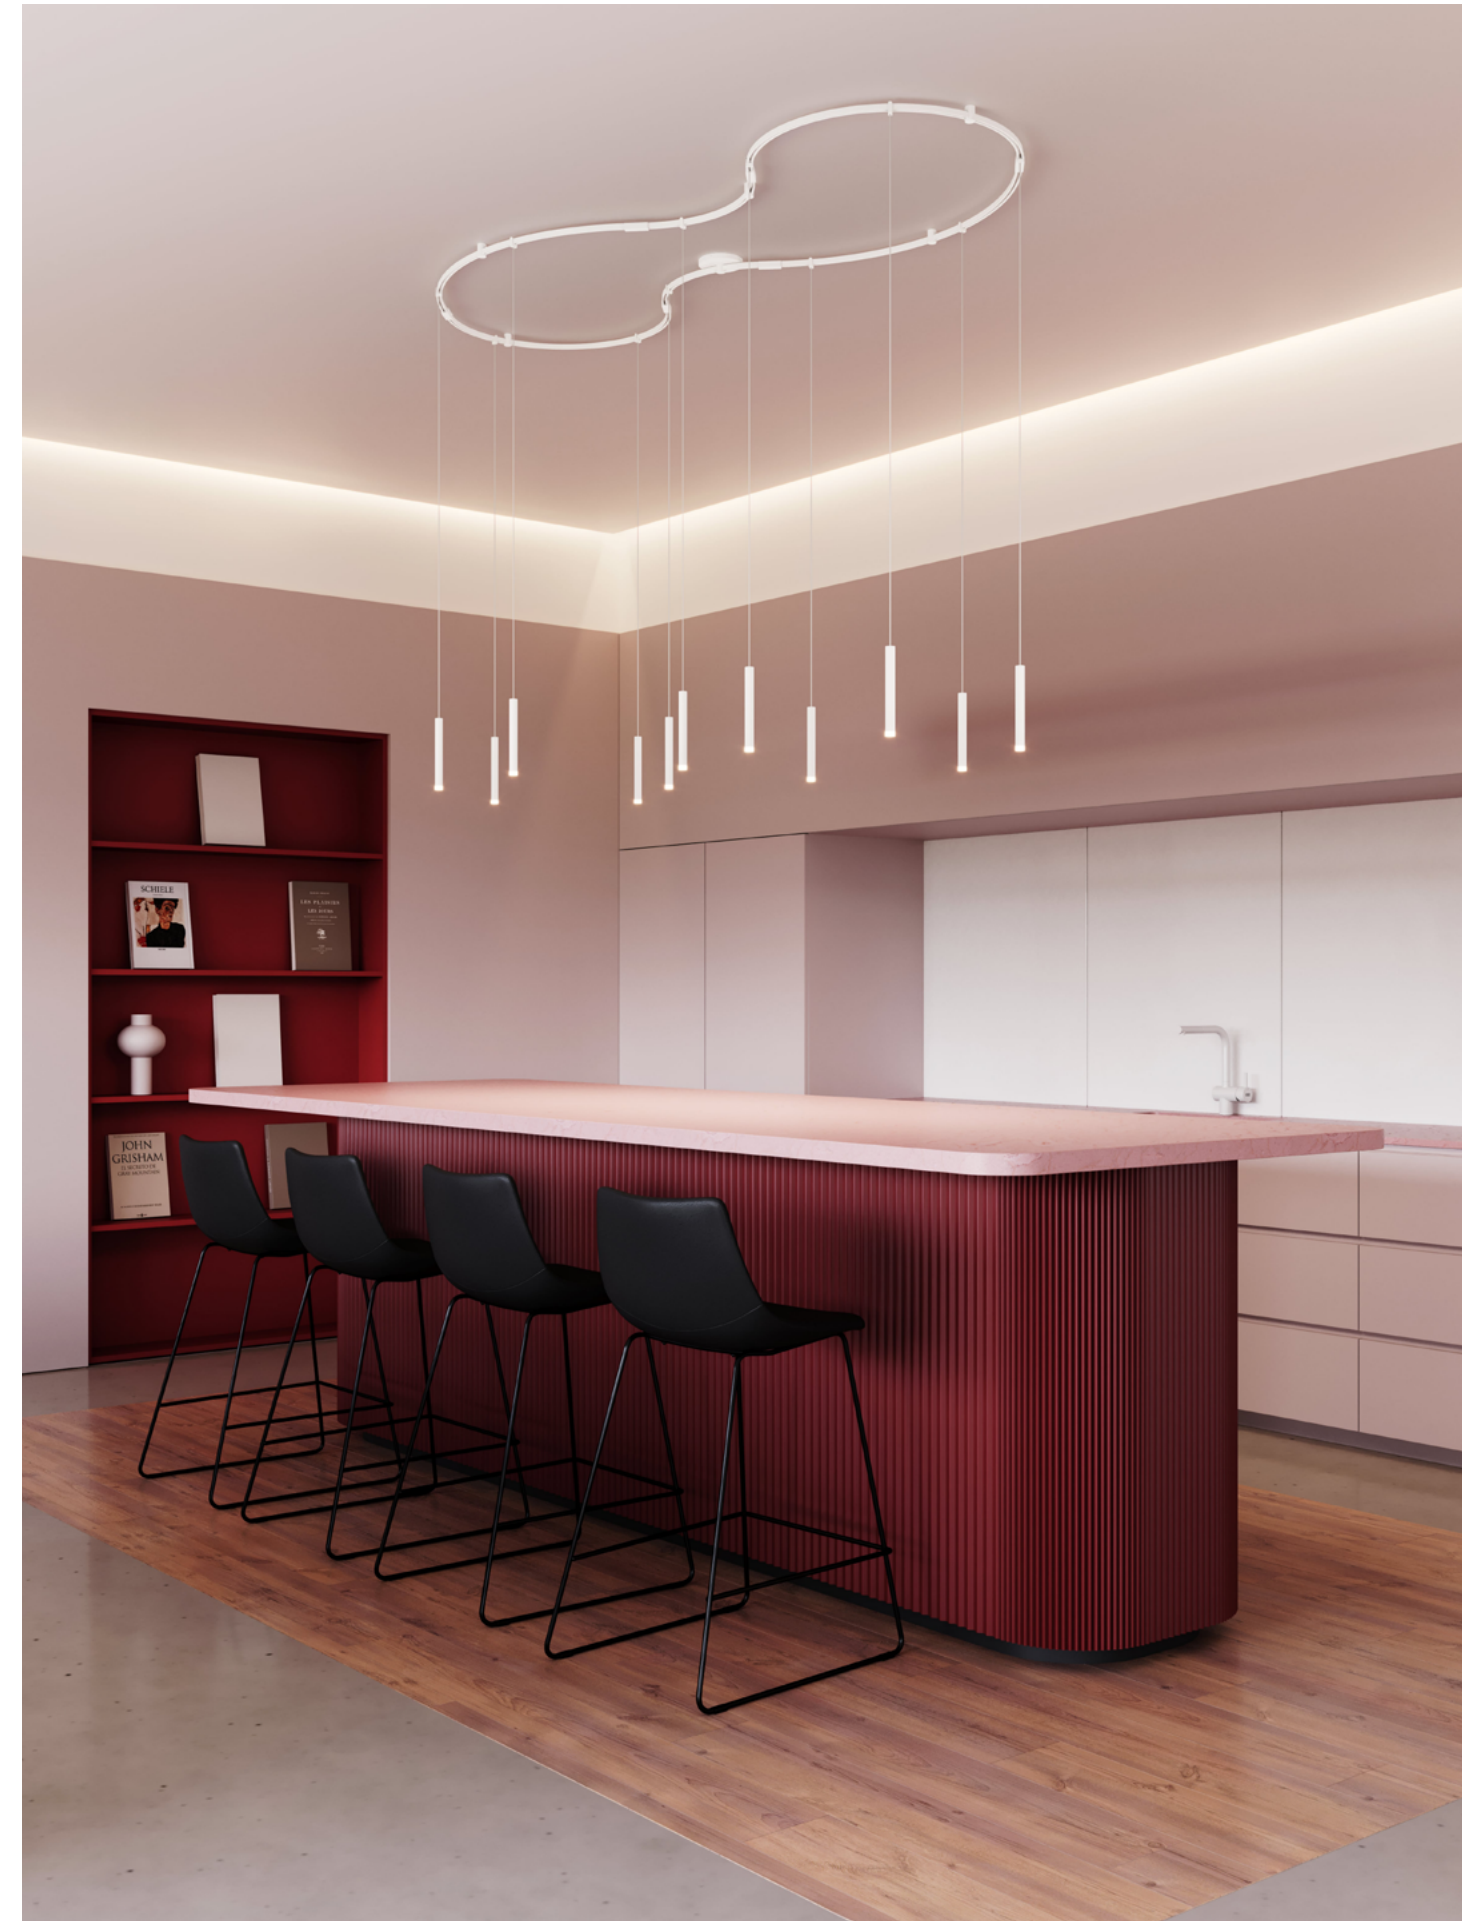

(2) SLS4833-K01-RH03WS



S-Curve Path

This curvilinear ceiling-mounted composition is shown with Power Precise Bar-Mounted Aimable Cylinders, providing controlled, directional lighting.

SLS4833-K01-RH03WS

Description:	S-Curve Path Ceiling Flush Mount
Dimensions:	4 1/2"H x 79"W x 33 1/2"D
Power Feed:	ø4 1/2" Ceiling Flush Mount Standard Power Feed
Luminaire:	(9) Power Precise Bar-Mounted Aimable Cylinder Light Engine with Wide Spot Trim (P. 140) Wattage: 72W, Lumens: 4410lm, CCT: 3000K, CRI 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



3-Tier Curve Path Matrix

A three-tiered composition of amorphic shapes in conversation. Shown here, Height Adjustable Through Cylinder Luminaires are hung singly or in multiples to define a fluid, sculptural volume.

SLS4834-W01-HA05

Description:	3-Tier Curve Path Matrix
Dimensions:	55"H (as shown) × 79 ½"W × 71"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	26"-335"
Luminaire:	(50) Height Adjustable Etched Through Cylinder Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 210W, Lumens: 22000lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120-277VAC input, 0-10V dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





2-Tier Stacked Racetrack Path

This configuration features small and bright Ladder Lights that are suspended between two tiers of Power Bars, creating a powerfully geometric volume.

SLS4823-K0718-LL01

Description:	80" x 32" 2-Tier Stacked Racetrack Path
Dimensions:	18"H x 84"W x 32 3/4"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	20"-91"
Luminaire:	(72) Crystal Ladder Light Luminaires (P. 134) Wattage: 72W, Lumens: 4320lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



3-Layer Stacked Racetrack Path

Featuring three nesting racetrack-shaped tiers of compact and powerful Ladder Lights, this configuration has a bold, architectural presence.

SLS4826-W0212-LL01

Description:	88" x 40" 3-Layer Stacked Racetrack Path
Dimensions:	24"H x 92"W x 40 3/4"D
Power Feed:	(3) ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	26"-85"
Luminaire:	(132) Crystal Ladder Light Luminaires (P. 134) Wattage: 132W, Lumens: 7920lm, CCT: 3000K, CRI: 90
Driver:	(3) Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





2-Tier Tandem

Two parallel Power Bars describe a broad linear space. Shown with Height Adjustable Etched Teardrop Luminaires that can be installed at any height.

SLS4835-W96-HA01

Description:	96" 2-Tier Tandem
Dimensions:	50"H (as shown) × 96 1/2"W × 12 1/2"D
Power Feed:	14"W x 5 1/2"D Shallow Tandem Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	23"-321"
Luminaire:	(20) Height Adjustable Etched Teardrop Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 60W, Lumens: 5500lm, CCT: 3000K, CRI: 90
Driver:	Power Feed, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



2-Tier Grid

Two perpendicular tiers of Power Bars define a commanding volume. As shown, Height Adjustable Light Tube Luminaires extend the configuration's verticality.

SLS4836-K72-HA07

Description:	72" 2-Tier Grid
Dimensions:	31 1/2"H (as shown) × 72 1/2"W × 72 1/2"D
Power Feed:	ø6" Shallow Linear Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	11"-321"
Luminaire:	(13) Height Adjustable Light Tube Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 270W, Lumens: 16605lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120-277VAC input, 0-10V dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



(2) SLS4837-W72-HA07




Gridscape

Perpendicular intersecting Power Bars create an expansive horizontal grid. Shown with Height Adjustable Light Tube Luminaires that define volume with layered depth.

SLS4837-W72-HA07

Description:	72" x 72" Gridscape
Dimensions:	23 1/2"H (as shown) x 72 1/2"W x 72 1/2"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	5"-316"
Luminaire:	(12) Height Adjustable 24" Light Tube Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 240W, Lumens: 14760lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120-277VAC input, 0-10V dimmable
Finish:	● Satin Black (K) ○ Satin White (W)

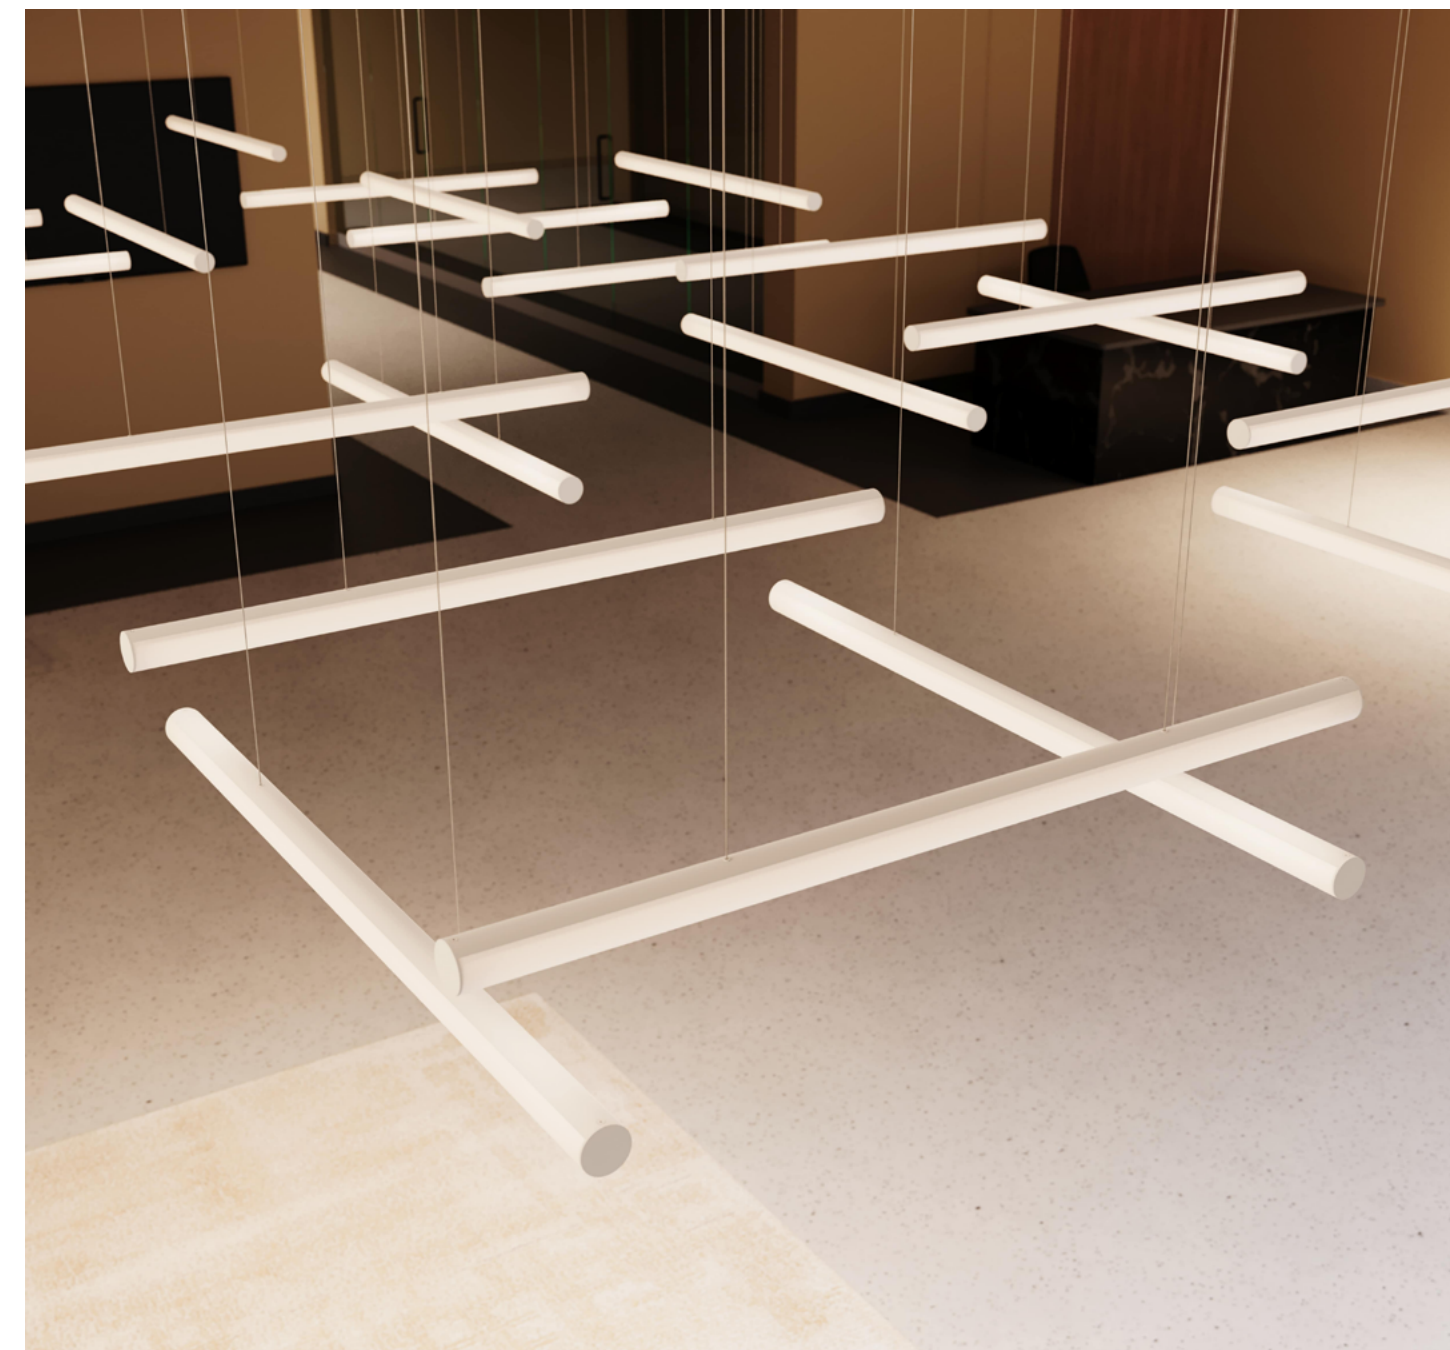


Gridscape

A structured framework suspends Height Adjustable Light Tube Luminaires in a strikingly architectural, compact configuration.

SLS4837-W44-HA07

Description:	48" x 24" Gridscape
Dimensions:	23 1/2"H (as shown) x 48 1/2"W x 24 1/2"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	5"-316"
Luminaire:	(4) Height Adjustable 24" Light Tube Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 80W, Lumens: 4920lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



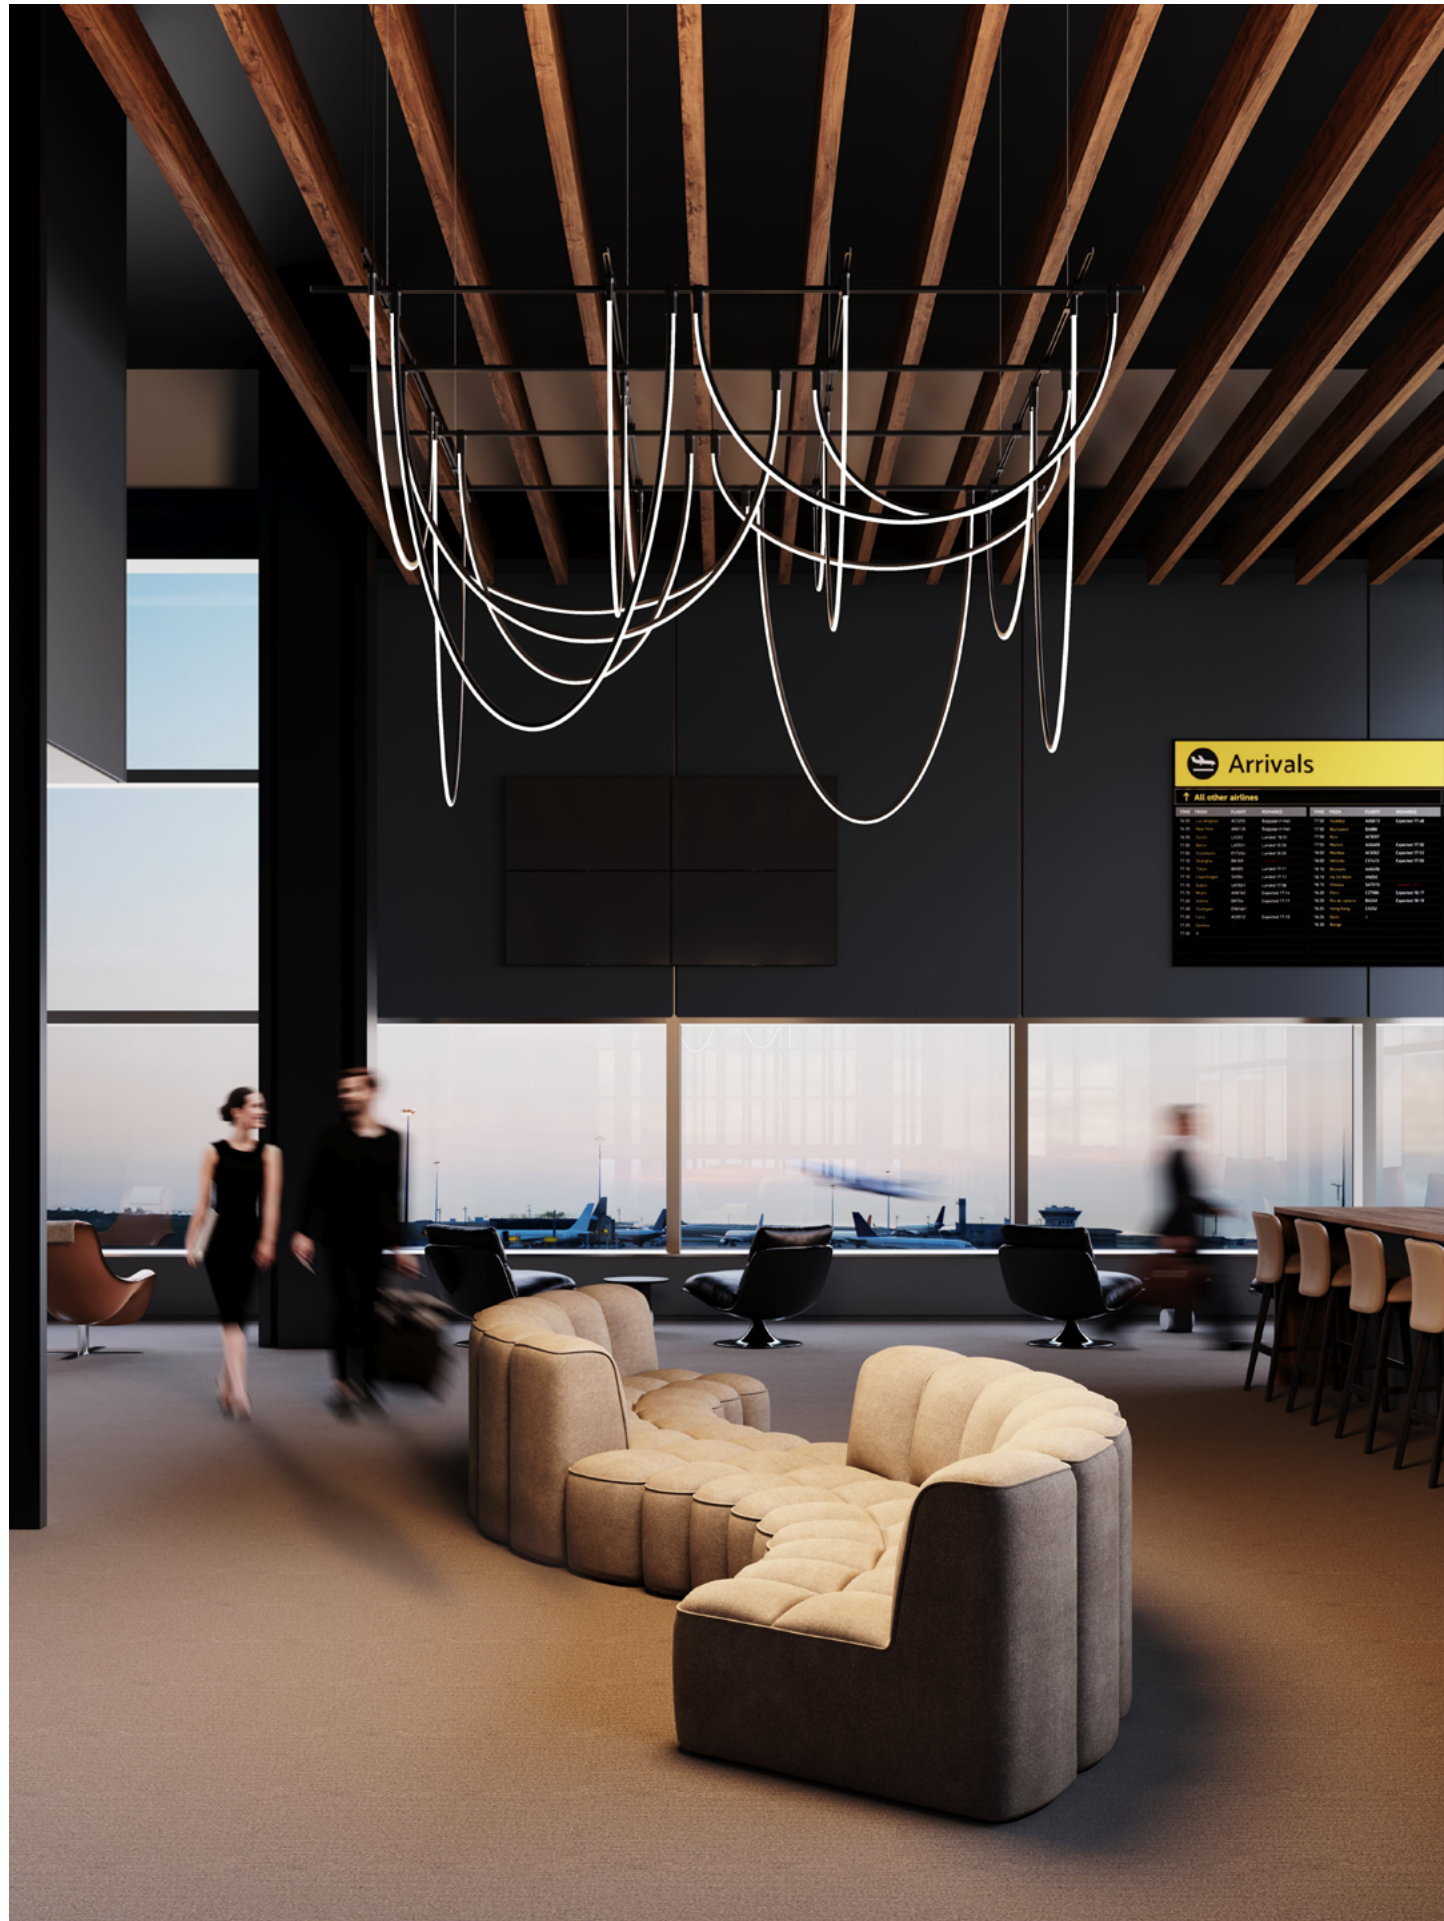

Gridscape

Linear Power Bars form a bold geometric grid that is balanced by the graceful fluidity of Light Curve Luminaires, offering warm illumination and sophisticated presence.

SLS4837-K72-LC

Description:	72" x 72" Gridscape
Dimensions:	38 1/2"H x 72 1/2"W x 72 1/2"D
Power Feed:	ø5" Shallow Single Double Power Feed w/6" Field-Cuttable Cord/Cable Hangers
Hanging Height:	40"-111"
Luminaire:	(16) Light Curve Luminaires (P. 144) Wattage: 176W, Lumens: 19370lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120-277VAC input, 0-10V dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



Freeform Tri-Bar

An airy, elegant composition of three Power Bars arranged radially in tiers. Here the minimal structure is complemented by a voluminous scatter of Monoline Thin Cylinder Luminaires.

SLS4838-W13-CL11

Description:	13' Freeform Tri-Bar
Dimensions:	ø168 1/2" × 97 1/2"H
Power Feed:	ø6 Shallow Linear Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	99"-153"
Luminaire:	(62) Monoline Thin Cylinder Luminaires (P. 135) Wattage: 124W, Lumens: 9300lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



(2) SLS4839-W46-HA01



Parallels

Closely spaced parallel Power Bars describe a minimalist rhythm. Shown with Height Adjustable Etched Teardrop Luminaires creating a dynamic three-dimensional array of illumination.

SLS4839-W46-HA01

Description:	96" x 48" Parallels
Dimensions:	88 1/2"H (as shown) x 96 1/2"W x 48 1/2"D
Power Feed:	ø4 1/2" Ceiling Flush Mount Standard Power Feed
Hanging Height:	16"-255"
Luminaire:	(40) Height Adjustable Etched Teardrop Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 120W, Lumens: 1100lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



Parallels

An expansive field of parallel Power Bars supports a sweeping, sculptural composition of Luminaires. Shown with Height Adjustable Globe Luminaires.

SLS4839-K96-HA04

Description:	96" x 96" Parallels
Dimensions:	99 1/2"H (as shown) x 96 1/2"W x 96 1/2"D
Power Feed:	ø1 1/2" Ceiling Flush Mount Remote Power Feed
Hanging Height:	12"-251"
Luminaire:	(54) Height Adjustable Etched Globe Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 297W, Lumens: 32670lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120-277VAC input, 0-10V dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





Rainfall

Linear Power Bars radiate out from a central ring, creating a large-scale statement piece. Shown with Height Adjustable Clear Teardrop Luminaires that create a striking arrangement of glittering light.

SLS4840-W10-HA02

Description:	10' Rainfall
Dimensions:	ø117 ¼" × 60 ¾"H (as shown)
Power Feed:	ø5" Shallow Single Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	16"-327"
Luminaire:	(66) Height Adjustable Clear Teardrop Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 198W, Lumens: 18150lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120-277VAC input, 0-10V dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



3-Bar Ring Ceiling Flush Mount

Hung two per cable set, Height Adjustable Etched Through Cylinder
Luminaires create an orb-like, three-dimensional shape when suspended
from concentric, ceiling-mounted rings.

SLS4841-K40-HA05

Description:	40" 3-Bar Ring Ceiling Flush Mount
Dimensions:	ø42 ¼" × 144 ¾"H (as shown)
Power Feed:	(3) ø1 ½" Ceiling Flush Mount Remote Power Feed
Hanging Height:	13"-244"
Luminaire:	(66) Height Adjustable Etched Through Cylindery Luminaires w/20' Field-Cutttable Cables (P. 137) Wattage: 297W, Lumens: 29040lm, CCT: 3000K, CRI: 90
Driver:	(3) Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)






4-Bar Ring Ceiling Flush Mount

Hung two per cable set, Height Adjustable Etched Through Cylinder Luminaires create an orb-like, three-dimensional shape when suspended from concentric, ceiling-mounted rings.

SLS4842-W48-HA05

Description:	48" 4-Bar Ring Ceiling Flush Mount
Dimensions:	ø50 1/2" x 148 1/2"H (as shown)
Power Feed:	(4) ø1 1/2" Ceiling Flush Mount Remote Power Feed
Hanging Height:	13"-244"
Luminaire:	(136) Height Adjustable Etched Through Cylindery Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 571W, Lumens: 59840lm, CCT: 3000K, CRI: 90
Driver:	(4) Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)

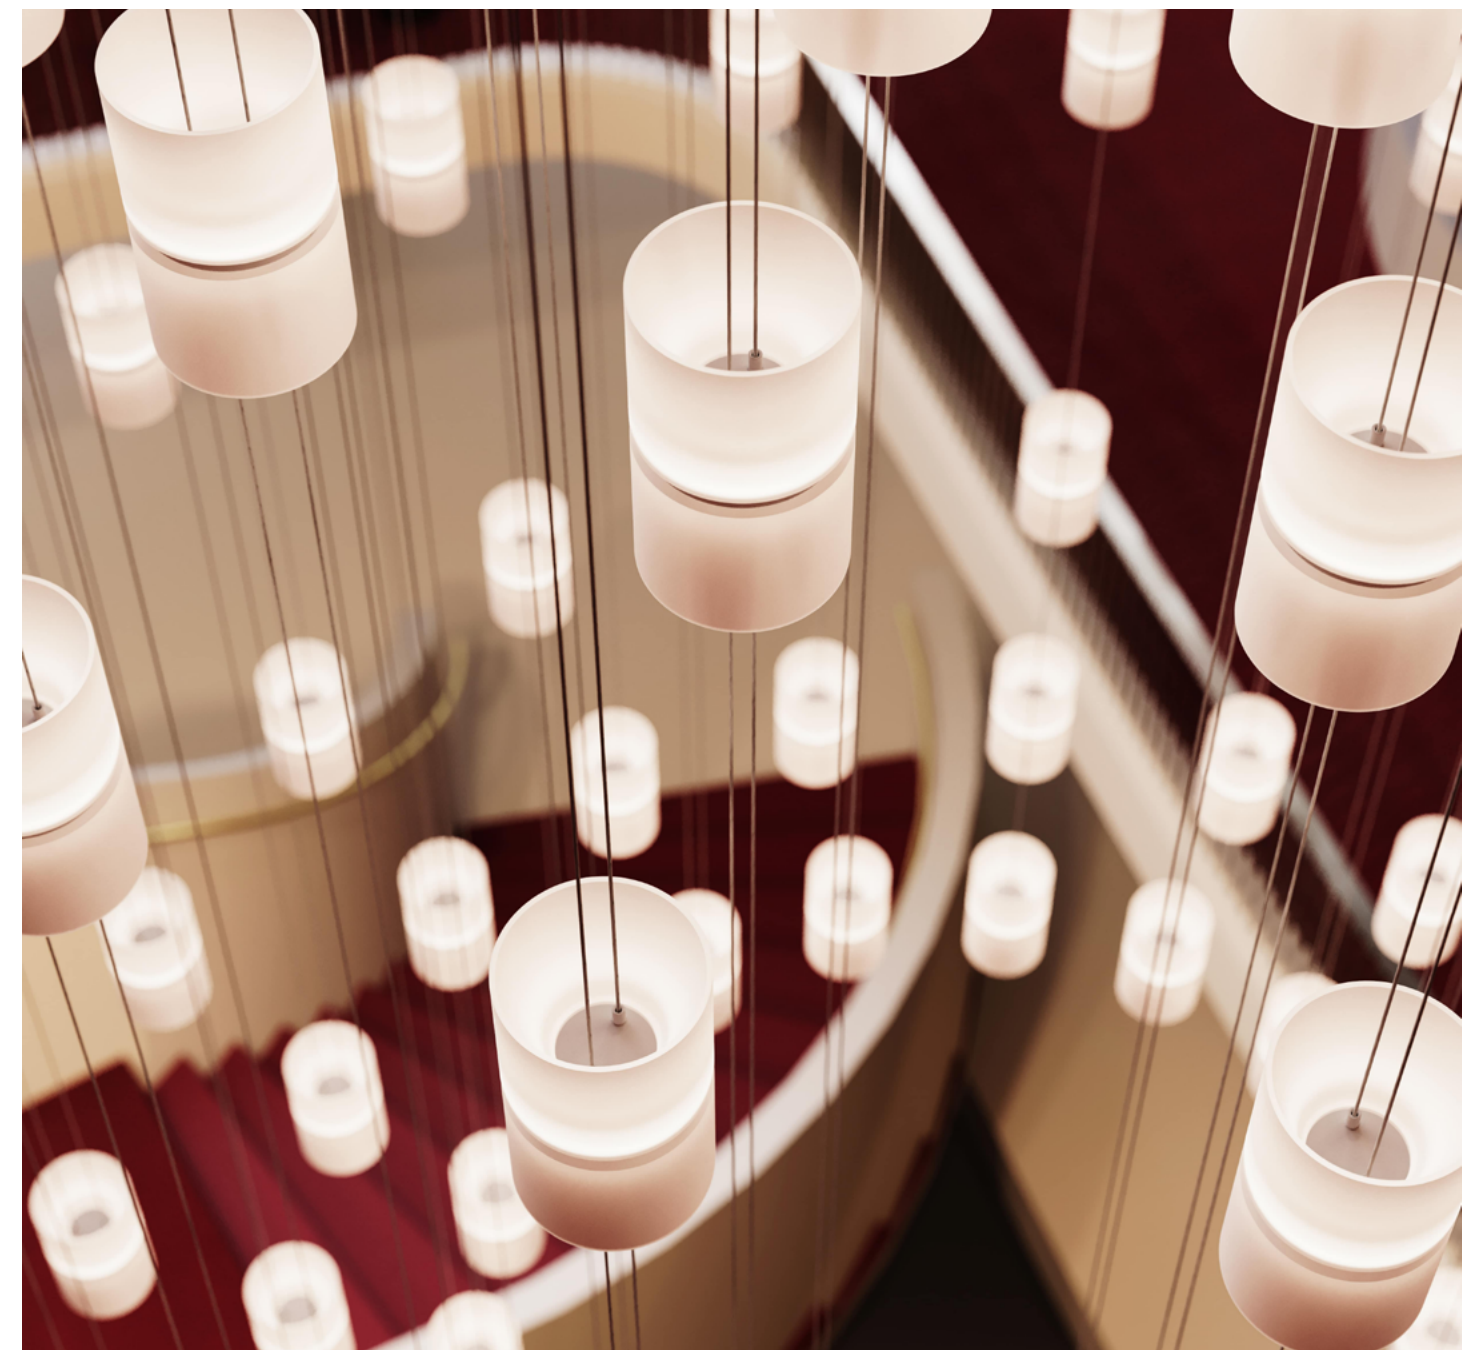

Offset Ring Horizontal Matrix

Offset from one another, Ring Power Bars—in four sizes—combine to form a monumentally scalable composition that extends horizontally to accent grand spaces. Shown here with Height Adjustable Through Cylinder Luminaires, suspended individually or in groups of two or three per cable set.

SLS4843-W04-HA05

Description:	Offset Ring Horizontal Matrix
Dimensions:	74"H (as shown) × 320"W × 92"D
Power Feed:	(4) ø5" Shallow Single Double Power Feed w/20' Field-Cuttable Cord/Cable Hangers
Hanging Height:	48"-485"
Luminaire:	(146) Height Adjustable Etched Through Cylinder Luminaires (P. 137) Wattage: 613W, Lumens: 64240lm, CCT: 3000K, CRI: 90
Driver:	(4) Remote, 120-277VAC input, 0-10V dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





Offset Ring Vertical Matrix

Circular Power Bars in tiered levels create a complex, ethereal arrangement, defining large vertical spaces with architectural clarity. Shown here, Height Adjustable Clear Teardrop Luminaires cascade gracefully from the rings.

SLS4844-W02-HA02

Description:	Offset Ring Vertical Matrix
Dimensions:	150 3/4"H (as shown) × 89 1/4"W × 73 3/4"D
Power Feed:	(2) ø5 Shallow Single Double Power Feed w/20' Field-Cuttable Cord Cable Hangers
Hanging Height:	118"-597"
Luminaire:	(76) Height Adjustable Clear Teardrop Luminaires w/20' Field-Cuttable Cables (P. 137) Wattage: 228W, Lumens: 20900lm, CCT: 3000K, CRI: 90
Driver:	(2) Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



4-Tier Gallery Matrix

Precise in its rectilinear simplicity and expansive in scale, the multi-tiered Gallery Matrix can be extended in any direction to complement grand spaces. Shown with Chiclets and Chiclet Clusters that provide approachable illumination in an orderly rhythm.

SLS4845-W02-SC30

Description:	4-Tier Gallery Matrix
Dimensions:	33"H x 243"W x 55"D
Power Feed:	(2) ø6" Shallow Linear Double Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	34"-93"
Luminaire:	(78) Etched Chiclet and Etched Chiclet Cluster Luminaires (P. 132) Wattage: 262W, Lumens: 18860lm, CCT: 3000K, CRI: 90
Driver:	(2) Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





Dual Power Linear

The new dual-circuit Power Bar gives twice the power in the same footprint. Two completely independent circuits can be controlled separately for maximum flexibility. Overlapping Light Curve Luminaires drape gracefully while providing warm, approachable light.

SLS4846-W72-LC

Description:	72" 2-Bar In-Line Power Linear
Dimensions:	38 3/4"H x 145 1/2"W x 1"D
Power Feed:	ø4.5" Dual Circuit Power Feed w/6' Field-Cuttable Cord/Cable Hangers
Hanging Height:	40"-110"
Luminaire:	(6) Light Curve Luminaires (P. 144) Wattage: 64W, Lumens: 7010lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)




Dual Power

Dual-circuit Power Bars allow maximal lighting flexibility with minimalist structure. A rectangular frame supports bar-level Power Precise illumination on one side and suspended Height Adjustable Linear Downlight Luminaires on the other. Each side can be controlled independently.

Custom Configuration Shown

Luminaires: Power Precise Bar-Mounted Aimable Cylinder Light Engines w/38° Wide Spot Trims (P. 140) and Height Adjustable Linear Downlight Luminaires w/20' Field-Cuttable Cables (P. 137)

Finish: ● Satin Black (K) ○ Satin White (W)

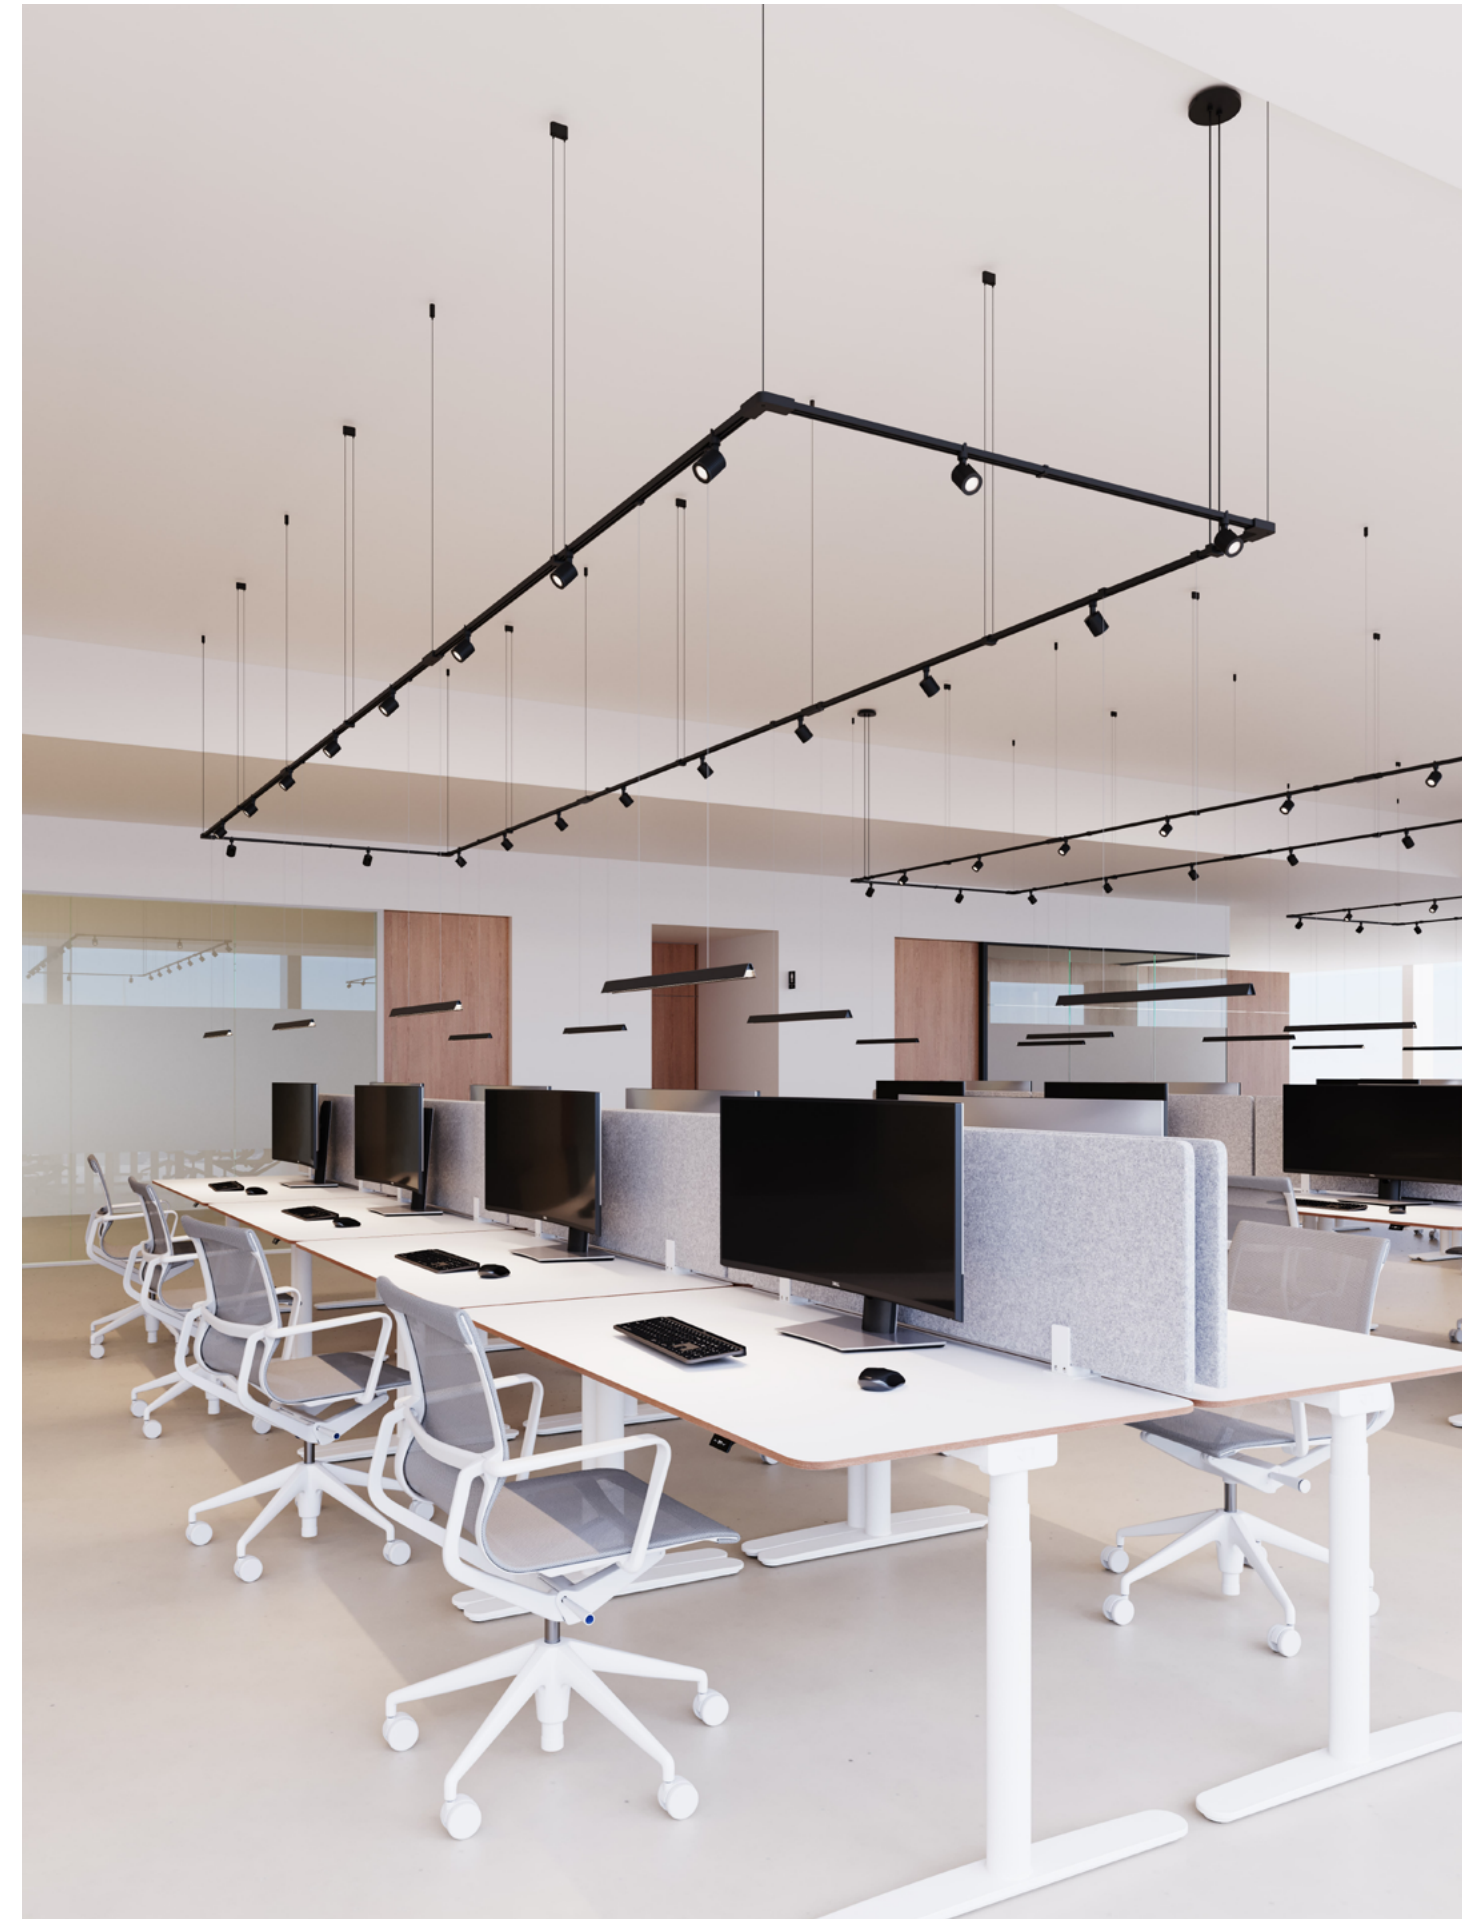

Mini Single Sconce

Sconce Power Feeds suspend one or more
Luminaires at a minimal distance to the wall.

SLS4848-W12-RP30

Description:	Mini Single Sconce
Dimensions:	15 1/2"H x 1 1/2", 3 1/2" Extension (ADA compliant)
Power Feed:	3 1/4"H x 2 1/4"W Mini Single Sconce Power Feed with Mini Box
Luminaire:	(1) Etched Chiclet Luminaire (P. 132) Wattage: 2W, Lumens: 115lm, CCT: 3000K, CRI: 90
Driver:	Mini Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)



Bar Sconce

Bar Sconce Power Feeds suspend one or more Luminaires at a minimal distance to the wall.

SLS4850-K18-CH04WS

Description:	18" Bar Sconce
Dimensions:	4 ¾"H x 18 ½"W, 4" Extension (ADA compliant)
Power Feed:	ø5" 18" Bar Sconce Power Feed
Luminaire:	(4) Power Precise Direct Mount Cylinder Light Engine with 38° Wide Spot Trim (P. 140) Wattage: 32W, Lumens: 1960lm, CCT: 3000K, CRI: 90
Driver:	Outlet Box, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





2-Bar Wall Mount

Wall-mounted Power Bars form a dramatic arrangement, while Mezzaluna Luminaires radiate a soft, artful glow through their semicircular diffusers.

SLS4853-W47-CH06

Description:	2-Bar Wall Mount
Dimensions:	72"H x 48"W, 2" Extension (ADA)
Power Feed:	ø1 ½" Wall Flush Mount Remote Power Feed
Luminaire:	(5) Mezzaluna Luminaires (P. 137) Wattage: 10W, Lumens: 700lm, CCT: 3000K, CRI: 90
Driver:	Remote, 120VAC input, ELV dimmable
Finish:	● Satin Black (K) ○ Satin White (W)





Luminaires

We offer dozens of Suspenders Luminaires, ranging from soft ambient lighting to performance-driven, targeted illumination. For 2025, we introduce a major expansion of the system. With a new White finish and infinitely-variable Height Adjustable Luminaires, Suspenders brings limitless possibilities to residential, hospitality, and commercial projects.

Double Rod Decorative Luminaires

Crystal Chiclet
1DXXXRP01K



Clear Ribbed Seeded Crystal
3 1/4" H x 1 1/2" W x 1/2" D
LED: 1.6 Watts, 115 Lumens

Etched Chiclet
1DXXXRP02K



Clear Etched Glass
3 1/4" H x 1 1/2" W x 1/2" D
LED: 1.6 Watts, 115 Lumens

Etched Smooth Chiclet
1DXXXRP30W



Clear Etched Glass
3 1/4" H x 1 1/2" W x 1/2" D
LED: 1.6 Watts, 115 Lumens

Ball
1DXXXRP03K



White Etched Cased Glass
3 1/4" H x ø2 1/4"
LED: 2.3 Watts, 160 Lumens

Crystal Oval
1DXXXRP04K



Clear Ribbed Seeded Crystal
2 3/4" H x 2 1/4" W x 2 1/4" D
LED: 2.3 Watts, 160 Lumens

Drum
1DXXXRP06K



White Etched Cased Glass
3 3/4" H x ø2 1/4"
LED: 3 Watts, 210 Lumens

Crystal Teardrop
1DXXXRP08K



Clear Ribbed Seeded Crystal
5 1/2" H x 2" W x 1 1/4" D
LED: 2.3 Watts, 175 Lumens

Reflector
1DXXXRP11K



Die-Cast Aluminum
2 1/2" H x ø3 3/4"
LED: 3 Watts, 210 Lumens

Crystal Double Rod
1DXXXRP13K



Clear Ribbed Seeded Crystal
3/4" H x 8 1/4" W x 3/4" D
LED: 3.4 Watts, 240 Lumens

Etched Double Rod
1DXXXRP14K



Clear Etched Glass
3/4" H x 8 1/4" W x 3/4" D
LED: 3.4 Watts, 240 Lumens

Crystal Rod
1DXXXRP15K



Clear Ribbed Seeded Crystal
6 3/4" H x 1" W x 3/4" D
LED: 1.7 Watts, 120 Lumens

Etched Rod
1DXXXRP16K



Clear Etched Glass
6 3/4" H x 1" W x 3/4" D
LED: 1.7 Watts, 120 Lumens

White Tapered Bell
1DXXXRP17K



White Etched Cased Glass
5 1/4" H x ø2 1/4"
LED: 3.6 Watts, 220 Lumens

Gray Tapered Bell
1DXXXRP18K



Gray Etched Cased Glass
5 1/4" H x ø2 1/4"
LED: 3.6 Watts, 220 Lumens

Amber Tapered Bell
1DXXXRP19K



Amber Etched Cased Glass
5 1/4" H x ø2 1/4"
LED: 3.6 Watts, 220 Lumens

Wings
1DXXXRP12K



Optical Acrylic
5" H x 2 1/4" W x 2 1/2" D
LED: 1.6 Watts, 115 Lumens

Cluster Luminaires

Crystal Chiclet Cluster
1DXXXHC01K




Clear Ribbed Seeded Crystal
5 3/4" H x 11 1/4" W x 1 1/2" D
LED: 4.8 Watts, 345 Lumens

Etched Chiclet Cluster
1DXXXHC02K




Clear Etched Glass
5 3/4" H x 11 1/4" W x 1 1/2" D
LED: 4.8 Watts, 345 Lumens

Etched Smooth Chiclet Cluster
1DXXXHC30W



Clear Etched Glass
5 3/4" H x 11 1/4" W x 1 1/2" D
LED: 4.8 Watts, 345 Lumens

Ball Cluster
1DXXXHC03K



White Etched Cased Glass
5 3/4" H x 11 1/4" W x 1 1/2" D
LED: 6.9 Watts, 480 Lumens

Crystal Oval Cluster
1DXXXHC04K



Clear Ribbed Seeded Crystal
6" H x 10" W x 2 1/4" D
LED: 6.9 Watts, 480 Lumens

V-Line Luminaires

Available in 16" and 32" cord lengths

Crystal Cylinder
1DXXXVC04K-XX



Clear Ribbed Seeded Crystal
2" H x ø1 ¼"
LED: 2.3 Watts, 160 Lumens

Etched Cylinder
1DXXXVC05K-XX



Clear Etched Glass
2" H x ø1 ¼"
LED: 2.3 Watts, 160 Lumens

Etched Smooth Cylinder
1DXXXVC09W-XX



Clear Etched Glass
2" H x ø1 ¼"
LED: 2.3 Watts, 160 Lumenst

Domed Ball
1DXXXVC06K-XX



White Optical Acrylic
2 1/2" H x ø2 ½"
LED: 2.3 Watts, 160 Lumens

Downlight Cone
1DXXXVC07K-XX



Die-Cast Aluminum
2 3/4" H x ø4"
LED: 3.6 Watts, 200 Lumens

Etched Glass Cone
1DXXXVC08K-XX



Clear Etched Glass
2 3/4" H x ø4"
LED: 3.6 Watts, 200 Lumens
O Satin White (W)

Crystal Rod
1DXXXVC15K-XX



Clear Ribbed Seeded Crystal
6 ¾" H x 1" W x ¾" D
LED: 1.7 Watts, 120 Lumens

Etched Rod
1DXXXVC16K-XX



Clear Etched Glass
6 ¾" H x 1" W x ¾" D
LED: 1.7 Watts, 120 Lumens

Monoline Luminaires

Available in 9", 18", 24", 36", 48", 60" and 72" cord lengths

Crystal Cylinder
1DXXXCL04K-XX



Clear Ribbed Seeded Crystal
8" H x ø1 ¼"
LED: 2.3 Watts, 160 Lumens

Etched Cylinder
1DXXXCL05K-XX



Clear Etched Glass
8" H x ø1 ¼"
LED: 2.3 Watts, 160 Lumens

Domed Ball
1DXXXCL06K-XX



White Optical Acrylic
8 1/2" H x ø2 ½"
LED: 2.3 Watts, 160 Lumens
O Satin White (W)

Downlight Cone
1DXXXCL07K-XX



Die-Cast Aluminum
8 3/4" H x ø4"
LED: 3.6 Watts, 200 Lumens

Thin Cylinder
1DXXXCL11K-XX



Aluminum w/Frosted Acrylic
7 1/2" H x ø¾"
LED: 2 Watts, 150 Lumens
O Satin White (W)

Clear Cylinder*
1DXXXCL01K-XX



Clear Glass
4 1/2" H x ø2 ¼"
LED: 4.2 Watts, 210 Lumens
*Only available in 9" and 18" cord lengths

Half Etched Cylinder*
1DXXXCL02K-XX



Half Etched Glass
4 1/2" H x ø2 ¼"
LED: 4.2 Watts, 210 Lumens
*Only available in 9" and 18" cord lengths

Half Etched Sphere*
1DXXXCL03K-XX



Half Etched Glass
4 3/4" H x ø3 ½"
LED: 4.2 Watts, 210 Lumens
*Only available in 9" and 18" cord lengths

Multi-light

Glass Cluster
1DXXXCL13K



Glass w/Frosted Acrylic
20" H x ø6 ¼"
LED: 2 Watts, 140 Lumens

Ladder Light
1DXXXLL01K



Optical Polymer
1" H X 1" W x 1" D
LED: 1 Watt, 60 Lumens
O Satin White (W)

Leaf
1DXXXCL15K-XX



Metal Reflector w/Frosted Acrylic
32" H x ø14 ¾"
LED: 2.5 Watts, 150 Lumens
Available in 9" and 18" cord lengths

Branch
1DXXXCL14K-XX



Frosted Acrylic
11" H x ø14 ¾"
LED: 2.5 Watts, 150 Lumens
Available in 9" and 18" cord lengths

Calla
1DXXXCL16K-XX



Frosted Acrylic w/PET Shade
12 3/4" H x ø23 ¾"
LED: 2.5 Watts, 150 Lumens
Available in 9" and 18" cord lengths

Bar-Mounted Light Bars

12" Light Bar
1DXXXLB12K



Aluminum w/Optical Acrylic Diffuser
1 1/2" H x 12" W x 3/4" D
LED: 4.8 Watts, 335 Lumens

24" Light Bar
1DXXXLB24K



Aluminum w/Optical Acrylic Diffuser
1 1/2" H x 24" W x 3/4" D
LED: 9.6 Watts, 670 Lumens

36" Light Bar
1DXXXLB36K



Aluminum w/Optical Acrylic Diffuser
1 1/2" H x 36" W x 3/4" D
LED: 14.4 Watts, 1005 Lumens

Suspended Light Bars

12" Suspended Light Bar
1DXXXLB12K-S



Aluminum w/Optical Acrylic Diffuser
1/2" H x 12 3/4" W x 3/4" D
LED: 4.8 Watts, 335 Lumens

24" Suspended Light Bar
1DXXXLB24K-S



Aluminum w/Optical Acrylic Diffuser
1/2" H x 23 3/4" W x 3/4" D
LED: 9.6 Watts, 670 Lumens

36" Suspended Light Bar
1DXXXLB36K-S



Aluminum w/Optical Acrylic Diffuser
1/2" H x 35" W x 3/4" D
LED: 14.4 Watts, 1005 Lumens

Linear Rotational Luminaires

9" Linear Rotational
1DXXXSR01K-09



Aluminum w/Optical Acrylic Diffuser
9" W x 3/4" w/360° rotation
LED: 5.7 Watts, 340 Lumens

12" Linear Rotational
1DXXXSR01K-12



Aluminum w/Optical Acrylic Diffuser
12" W x 3/4" w/360° rotation
LED: 8.3 Watts, 500 Lumens

18" Linear Rotational
1DXXXSR01K-18



Aluminum w/Optical Acrylic Diffuser
18" W x 3/4" w/360° rotation
LED: 10.7 Watts, 640 Lumens

Height Adjustable Luminaires

w/ 20' Field-Cuttable Cable

Etched Teardrop
1DXXXHA01K



Clear Etched Glass
6 1/2" H x 1 3/4"
LED: 3 Watts, 275 Lumens
O Satin White (W)

Clear Teardrop
1DXXXHA02K



Clear Acrylic
6 1/2" H x 1 3/4"
LED: 3 Watts, 275 Lumens
O Satin White (W)

Etched Globe
1DXXXHA04K



White Etched Cased Glass
2 1/2" H x 3 1/2"
LED: 5.5 Watts, 605 Lumens
O Satin White (W)

Etched Through Cylinder
1DXXXHA05K



Clear Etched Acrylic
3 3/4" H x 2 1/4"
LED: 4.2 Watts, 440 Lumens
O Satin White (W)

Height Adjustable Linear

w/ 20' Field-Cuttable Cable

24" Linear Downlight
1DXXXHA06K-24



Aluminum w/Optical Acrylic Diffuser
1" H X 24" W X 1" D
LED: 20 Watts, 1230 Lumens
O Satin White (W)

36" Linear Downlight
1DXXXHA06K-36



Aluminum w/Optical Acrylic Diffuser
1" H X 36" W X 1" D
LED: 30 Watts, 1845 Lumens
O Satin White (W)

24" Light Tube
1DXXXHA07K-24



White Optical Acrylic
24" W x 1"
LED: 20 Watts, 1230 Lumens
O Satin White (W)


36" Light Tube
1DXXXHA07K-36



White Optical Acrylic
36" W x 1"
LED: 30 Watts, 1845 Lumens
O Satin White (W)

Miscellaneous

Mezzaluna
1DXXXCH06K



Aluminum w/Acrylic Light Guide
3" H x 5 3/4" W x 3/4" D
LED: 2 Watts, 140 Lumens
O Satin White (W)

Light Guide Disk
1DXXXRH07K



Aluminum w/Acrylic Light Guide
1/2" H x 4"
LED: 4 Watts, 150 Lumens
w/360° rotation and 180° tilt

Precise Cylinder Light Engines

Precise Suspended Cylinder
1DXXR20K




Aluminum
2" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens

Precise Single Cord Cylinder
1DXXC09K



Aluminum
7 3/4" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens
Available Cord Lengths: 9", 18", 36"

Precise Suspended Aimable Cylinder
1DXXR21K

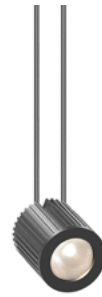

Aluminum
2" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens
w/180° tilt

Precise Bar-Mounted Aimable Cylinder (Double Rod version)
1DXXC02K



Aluminum
2 1/4" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens
w/360° rotation and 180° tilt

Precise Bar-Mounted Aimable Cylinder (Blade version)
1DXXR01K



Aluminum
1 3/4" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens
w/360° rotation and 180° tilt

Precise Bar-Mounted Aimable Smooth Cylinder (Blade version)
1DXXR08W



Aluminum
1 3/4" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens
w/360° rotation and 180° tilt

Precise Direct Mount Cylinder
1DXXC01K-X



Aluminum
2 1/4" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens

Precise Direct Mount Smooth Cylinder
1DXXC08W-X



Aluminum
2 1/4" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens

Precise Bar-Mounted Single Cylinder
1DXXC01K



Aluminum
2 1/4" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens

Precise Bar-Mounted Duplex Cylinder
1DXXC03K



Aluminum
4" H x ø1 3/4"
LED: 9 Watts, 560 Lumens

Precise Suspended Tall Cylinder
1DXXR22K



Aluminum
7 1/4" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens

Precise Single Cord Tall Cylinder
1DXXC10K



Aluminum
13 1/4" H x ø1 3/4"
LED: 4.5 Watts, 280 Lumens
Available Lengths: 18", 72"
Lengths are adjustable

Precise Cylinder Trim Options

1XZ010001K ● (K) ○ (W)
30° Spot Lens



1XZ010002K ● (K) ○ (W)
50° Flood Lens

1XZ010015K
Asymmetric Anti-Glare Snoot with 30° Spot Lens



1XZ010016K
Asymmetric Anti-Glare Snoot with 50° Flood Lens

1XZ010012K
Anti-Glare Snoot with 30° Spot Lens



1XZ010013K
Anti-Glare Snoot with 50° Flood Lens

1XZ010003K
Glass Drum Diffuser



1XZ010010K
Barndoors with 30° Spot Lens



1XZ010011K
Barndoors with 50° Flood Lens

1XZ010019K
Parasol Shade



1XZ010004K
Parachute Reflector



1XZ010005K
Wall Parachute Reflector

Power Precise Cylinder Light Engines

Power Precise Suspended Cylinder
1DXDXRP26K



Aluminum
2 1/2" H x ø2 1/4"
LED: 8 Watts, 490 Lumens

Power Precise Single Cord Cylinder
1DXDXCL12K



Aluminum
8 3/4" H x ø2 1/4"
LED: 8 Watts, 490 Lumens
Available Lengths: 9", 18", 36"

Power Precise Suspended Aimable Cylinder
1DXDXRP27K



Aluminum
2 1/2" H x ø2 1/4"
LED: 8 Watts, 490 Lumens
w/180° tilt

Power Precise Bar-Mounted Cylinder
1DXDXCH04K



Aluminum
2" H x ø2 1/4"
LED: 8 Watts, 490 Lumens

Power Precise Bar-Mounted Aimable Cylinder
1DXDXRH03K



Aluminum
2 1/2" H x ø2 1/4"
LED: 8 Watts, 490 Lumens
w/360° rotation and 180° tilt

Power Precise Bar-Mounted Aimable Cylinder
1DXDXRH09W



Aluminum
2 1/2" H x ø2 1/4"
LED: 8 Watts, 490 Lumens
w/360° rotation and 180° tilt

Power Precise Direct Mount Cylinder
1DXDXCH04K-X



Aluminum
2 1/2" H x ø2 1/4"
LED: 8 Watts, 490 Lumens

Power Precise Direct Mount Cylinder
1DXDXCH09W-X



Aluminum
2 1/2" H x ø2 1/4"
LED: 8 Watts, 490 Lumens

Power Precise Bar-Mounted Duplex Cylinder
1DXDXCH07K




Aluminum
4 3/4" H x ø2 1/4"
LED: 16 Watts, 980 Lumens

Power Precise Cylinder Trim Options

1XZ020101K ● (K) ○ (W)
15° Narrow Spot Lens



1XZ020102K ● (K) ○ (W)
38° Wide Spot Lens



1XZ020103K ● (K) ○ (W)
60° Flood Lens



1XZ020301K
Asymmetric Anti-Glare Snoot with 15° Narrow Spot Lens

1XZ020302K
Asymmetric Anti-Glare Snoot with 38° Wide Spot Lens

1XZ020303K
Asymmetric Anti-Glare Snoot with 60° Flood Lens

1XZ020201K
Anti-Glare Snoot with 15° Narrow Spot Lens

1XZ020202K
Anti-Glare Snoot with 38° Wide Spot Lens

1XZ020203K
Anti-Glare Snoot with 60° Flood Lens

1XZ020601K
Cone Shade with 15° Narrow Spot Lens



1XZ020602K
Cone Shade with 38° Wide Spot Lens

1XZ020603K
Cone Shade with 60° Flood Lens

1XZ020501K
Bell Shade with 15° Narrow Spot Lens



1XZ020502K
Bell Shade with 38° Wide Spot Lens

1XZ020503K
Bell Shade with 60° Flood Lens

1XZ020801K
Glass Cone Shade



1XZ020701K
Glass Bell Shade



Power Precise Cube Light Engines

Power Precise Suspended Aimable Cube
1XDXXRP28K



Aluminum
2 1/4" H x 1 3/4" W x 1 3/4" D
LED: 8 Watts, 490 Lumens

Power Precise Suspended Aimable Cube
1XDXXRP29K



Aluminum
2 1/4" H x 1 3/4" W x 1 3/4" D
LED: 8 Watts, 490 Lumens
w/180° tilt

Power Precise Bar-Mounted Aimable Cube
1XDXXRH04K



Aluminum
2 1/2" H x 1 3/4" W x 1 3/4" D
LED: 8 Watts, 490 Lumens
w/360° rotation and 180° tilt

Power Precise Direct Mount Cube
1DXDXCH05K-X



Aluminum
2 1/4" H x 1 3/4" W x 1 3/4" D
LED: 8 Watts, 490 Lumens

Precise Cell Light Engines

Precise Suspended Aimable 3-Cell
1XDXXRP23K



Aluminum
1 1/2" H x 3 1/4" W x 1" D
LED: 3 Watts, 210 Lumens
w/180° tilt

Precise Suspended Aimable 6-Cell
1XDXXRP24K



Aluminum
1 1/2" H x 6 1/2" W x 1" D
LED: 6 Watts, 420 Lumens
w/180° tilt

Precise Bar-Mounted Aimable 3-Cell
1XDXXRH05K



Aluminum
3 1/2" H x 3 1/4" W x 1" D
LED: 3 Watts, 210 Lumens
w/360° rotation and 180° tilt

Precise Bar-Mounted Aimable 6-Cell
1XDXXRH06K



Aluminum
3 1/2" H x 6 1/2" W x 1" D
LED: 6 Watts, 420 Lumens
w/360° rotation and 180° tilt

Precise Sphere Light Engines

Precise Suspended Aimable Sphere
1XDXXRP25K



Aluminum
2" H x ø2 1/4" w/180° tilt
LED: 4.5 Watts, 280 Lumens
w/180° tilt

Precise Bar-Mounted Aimable Sphere
1XDXXRH02K



Aluminum
2" H x ø2 1/4" w/180° tilt
LED: 4.5 Watts, 280 Lumens
w/360° rotation and 180° tilt

Power Precise Cube Trim Options

1XZ030101K
15° Narrow Spot Lens

1XZ030102K
38° Wide Spot Lens

1XZ030103K
60° Flood Lens



1XZ030301K
Asymmetric Anti-Glare Snoot with 15° Narrow Spot Lens

1XZ030302K
Asymmetric Anti-Glare Snoot with 38° Wide Spot Lens

1XZ030303K
Asymmetric Anti-Glare Snoot with 60° Flood Lens



1XZ030201K
Anti-Glare Snoot with 15° Narrow Spot Lens

1XZ030202K
Anti-Glare Snoot with 38° Wide Spot Lens

1XZ030203K
Anti-Glare Snoot with 60° Flood Lens



Precise Cell Trim Options

1XZ040001K
3-Cell 10° Lens

1XZ040002K
3-Cell 10°x35° Lens

1XZ040003K
3-Cell 24° Lens

1XZ040004K
3-Cell 48° Lens



1XZ040005K
6-Cell 10° Lens

1XZ040006K
6-Cell 10°x35° Lens

1XZ040007K
6-Cell 24° Lens

1XZ040008K
6-Cell 48° Lens



Precise Sphere Trim Options

1XZ010017K
30° Spot Lens

1XZ010018K
50° Flood Lens



Light Curve Luminaires

Light Curve Luminaire, 24"x12"
1DXXLC24K-12



Aluminum with Silicon Diffuser
14 3/4"H x 25"W x 3/4"D
Wattage: 6.9W, Lumens: 760lm

Light Curve Luminaire, 24"x12"
1DXXLC24W-12



Aluminum with Silicon Diffuser
14 3/4"H x 25"W x 3/4"D
Wattage: 6.9W, Lumens: 760lm

Light Curve Luminaire, 24"x24"
1DXXLC24K-24



Aluminum with Silicon Diffuser
26 3/4"H x 25"W x 3/4"D
Wattage: 10.7W, Lumens: 1180lm

Light Curve Luminaire, 24"x24"
1DXXLC24W-24



Aluminum with Silicon Diffuser
26 3/4"H x 25"W x 3/4"D
Wattage: 10.7W, Lumens: 1180lm

Light Curve Luminaire, 24"x36"
1DXXLC24K-36



Aluminum with Silicon Diffuser
38 3/4"H x 25"W x 3/4"D
Wattage: 14.7W, Lumens: 1620lm

Light Curve Luminaire, 24"x36"
1DXXLC24W-36



Aluminum with Silicon Diffuser
38 3/4"H x 25"W x 3/4"D
Wattage: 14.7W, Lumens: 1620lm

Light Curve Luminaire, 36"x12"
1DXXLC36K-12



Aluminum with Silicon Diffuser
14 3/4"H x 37"W x 3/4"D
Wattage: 8.7W, Lumens: 960lm

Light Curve Luminaire, 36"x12"
1DXXLC36W-12



Aluminum with Silicon Diffuser
14 3/4"H x 37"W x 3/4"D
Wattage: 8.7W, Lumens: 960lm

Light Curve Luminaire, 36"x18"
1DXXLC36K-18



Aluminum with Silicon Diffuser
20 3/4"H x 37"W x 3/4"D
Wattage: 10.4W, Lumens: 1150lm

Light Curve Luminaire, 36"x18"
1DXXLC36W-18



Aluminum with Silicon Diffuser
20 3/4"H x 37"W x 3/4"D
Wattage: 10.4W, Lumens: 1150lm

Light Curve Luminaire, 36"x24"
1DXXLC36K-24



Aluminum with Silicon Diffuser
26 3/4"H x 37"W x 3/4"D
Wattage: 12.2W, Lumens: 1340lm

Light Curve Luminaire, 36"x24"
1DXXLC36W-24




Aluminum with Silicon Diffuser
26 3/4"H x 37"W x 3/4"D
Wattage: 12.2W, Lumens: 1340lm

Index by Configuration

3-Bar Offset Ring

→ P. 70



1-Tier Rectangle Path

→ P. 72



3-Tier Rectangle Path Matrix

→ P. 74



Path

→ P. 76



Linear

→ P. 46



2-Bar In-Line Linear

→ P. 48



1-Tier Linear

→ P. 50



3-Bar In-Line Linear

→ P. 52



1-Tier Racetrack Path

→ P. 78



Racetrack Path

→ P. 80



Z-Curve Path

→ P. 82




S-Curve Path

→ P. 84



2-Tier Linear

→ P. 54




5-Bar Offset Linear

→ P. 56



1-Tier Tri-Bar

→ P. 58



4-Tier Tri-Bar

→ P. 60



3-Tier Curve Path Matrix

→ P. 86



2-Tier Stacked Racetrack Path

→ P. 88



3-Layer Stacked Racetrack Path

→ P. 90




2-Tier Tandem

→ P. 92




Single Ring

→ P. 62



Double Ring

→ P. 64



Offset Ring

→ P. 66




2-Bar Offset Ring

→ P. 68



2-Tier Grid

→ P. 94



Gridscape

→ P. 96




Gridscape

→ P. 98



Gridscape

→ P. 100



Freeform Tri-Bar

→ P. 102



Parallels

→ P. 104



Parallels

→ P. 106




Rainfall

→ P. 108



3-Bar Ring

→ P. 110



4-Bar Ring

→ P. 112




Offset Ring Horizontal Matrix

→ P. 114



Offset Ring Vertical Matrix

→ P. 116



4-Tier Gallery Matrix

→ P. 118




Dual Power Linear

→ P. 120




Dual Power

→ P. 122



Mini Single Sconce

→ P. 124



Bar Sconce

→ P. 126



2-Bar Wall Mount

→ P. 128



"Driven by what's next, we illuminate spaces with architecturally inspired lighting."

Nuno Pires da Silva

Headquarters

103 Tower Dr
Middletown, NY 10941

P. 914 834 3600
csr@sonnemanawayoflight.com

Flagship Showroom

New York Design Center
200 Lexington Ave
New York, NY 10016

P. 914 834 3600

Showroom Manager
Jason Acosta
jasona@sonneman.com

Connect with us

@sonnemanlight

Instagram Facebook YouTube X LinkedIn Pinterest



sonnemanlight.com



Credits

SONNEMAN – A Way of Light
New York, NY 10018

Creative + Design Direction
Nuno Pires da Silva

Art Direction + Photography
Diogo Paulo

Product Development
Andrew Garrison
Yang Wang

Visualization
Vasco Oliveira
Marcel Marquez

Copywriting
Sam Broder-Fingert
Andrew Garrison

Technical Information
Nicolas Carmichael
Patrick MacGregor
Andrew Garrison
Yang Wang

SONNEMAN®

A WAY OF LIGHT

Suspenders®
Catalog

VOL.

6

