

SONNEMAN - A WAY OF LIGHT

TEST REPORT

SCOPE OF WORK

LED Performance Testing

MODEL NUMBER

1XDXXHA01W

PROJECT NUMBER

G106005580

REPORT NUMBER

106005580CRT-003

ISSUE DATE

5/30/2025

REVISION DATE

None

TEST DATES

5/30/2025

DOCUMENT CONTROL NUMBER

RTTDS-R-AMER-Test-3407

© 2017 INTERTEK



WARNING: This document may contain information subject to EAR99.
Diversion contrary to US law is prohibited.

REPORT NUMBER

106005580CRT-003

MODEL NUMBER(s)

1XDXXHA01W

REPORT RENDERED TO:

SONNEMAN - A WAY OF LIGHT
103 TOWER DRIVE
MIDDLETOWN, NY 10941
USA

STATEMENT OF LIMITATION

NVLAP Lab Code 100402-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. government.

AUTHORIZATION


The testing performed was authorized by signed quote number Qu-01491297-0.

TEST STANDARDS

ANSI/IES LM-79-19: Optical and Electrical Measurements of Solid State Lighting Products

In Charge of Testing:

Reviewer:



Kristie Ray
Team Lead, Engineering
Lighting Division



Melanie Brittain
Senior Associate Engineer
Lighting Division

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

SAMPLE INFORMATION

REPORT NO. 106005580CRT-003

ITEMS RECEIVED

Item No.	Control No.	Model No.	Description	Type	Received Date	Sampling Date
1	CRT2505201423-007-001	1XDXXHA01W	Etched Teardrop Luminaire w/20' Cables	Production	5/20/2025	N/A
2	CRT2505201423-007-005	LTF TA60WA24LED65B15	Driver	Production	5/20/2025	N/A
3	CRT2505201423-007-006	1XC01XX48K	48" Linear Power Bar	Production	5/20/2025	N/A

TESTED SAMPLE CONFIGURATIONS

Config No.	Tested Model No.	Item Nos. Utilized
1	1XDXXHA01W	1,2,3

SAMPLE PHOTOS



SUMMARY

REPORT NO. 106005580CRT-003

PRODUCT INFORMATION AND SUMMARY OF DATA

Test Configuration 1	
Product Model No.:	1XDXXHA01W
Product Description:	Etched Teardrop Luminaire w/20' Cables
LED Model No.:	Proprietary
Driver Model No.:	LTF TA60WA24LED65B15

Criteria	Results
Light Output (lumens)	99.5
Input Power (W) @ 120 (Vac)	3.75
Luminous Efficacy (lm/W)	26.6
Input Power Factor () @ 120 (Vac)	0.941

TEST METHODS

SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS

No seasoning was performed in accordance with ANSI/IES LM-79-19

DUT SAMPLING METHOD

For testing plans, program requirements, or shipments requiring sampling of DUTs or components, the selections for each test were random. All samples are marked with control numbers regardless of being tested.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

A Type C Mirror Goniophotometer system was used to measure the luminous intensity (candela) at each angle of distribution for the DUT. Electrical measurements of the unit were measured using a power analyzer. Each DUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature and relative humidity was measured at $25^{\circ}\text{C} \pm 1.2^{\circ}\text{C}$ and 10-65% respectively at a position within 1.5m and at equal height of the DUT. Stabilization procedures to LM-79-19 were followed. The test distance was $\geq 5x$ the longest luminous dimension of the DUT.

ANSI/IES Technical Memorandums (TM) reported are not NVLAP accredited

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

REPORT NO. 106005580CRT-003

Test Configuration	Tested Model No.	Pass/Fail/NA
1	1XDXXHA01W	NA

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS

Base Orientation	Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor (I)
Up	120.10	33.2	3.75	0.941

Light Output (lm)	Efficacy (lm/W)
99.5	26.6

LUMINOUS INTENSITY SUMMARY (candela)

Vertical Angle (°)	Horizontal					Polar Candela Plot	
	0	22.5	45	67.5	90		
0	20	20	20	20	20		
5	19	19	19	19	19		
10	22	21	21	21	21		
15	24	24	24	23	24		
20	26	26	26	27	27		
25	25	25	25	26	27		
30	23	23	24	25	27		
35	21	21	22	23	24		
40	19	19	19	21	21		
45	17	17	17	18	18		
50	15	14	14	15	15		
55	13	13	12	12	12		
60	11	11	10	10	10		
65	10	9	9	9	8		
70	8	8	8	7	7		
75	7	7	7	6	6		
80	6	6	6	6	5		
85	5	5	5	5	5		
90	5	5	5	4	4		
95	4	4	4	4	4		
100	4	4	4	4	4		
105	4	4	4	4	3		
110	4	4	4	3	3		
115	3	4	3	3	3		
120	3	3	3	3	3		
125	3	3	3	3	3		
130	3	3	3	3	3		
135	3	3	3	3	3		
140	3	3	3	2	2		
145	2	2	2	2	2		
150	2	2	2	2	2		
155	2	2	2	2	2		
160	2	2	2	2	2		
165	1	1	1	1	1		
170	0	0	0	1	0		
175	0	0	0	0	0		
180	0	0	0	0	0		

Full luminous intensity matrix found in .IES file

REPORT NO. 106005580CRT-003

ORIENTATION AND ALIGNMENT OF DUT

Luminous Opening		
Length (ft)	Width (ft)	Height (ft)
0.15	0.15	0.31
0°-180° H	90°-270° H	0°-180° V


Test Distance (ft)
29.2

PHOTOMETRIC CENTER OF DUT



REPORT NO. 106005580CRT-003

ILLUMINANCE SUMMARY

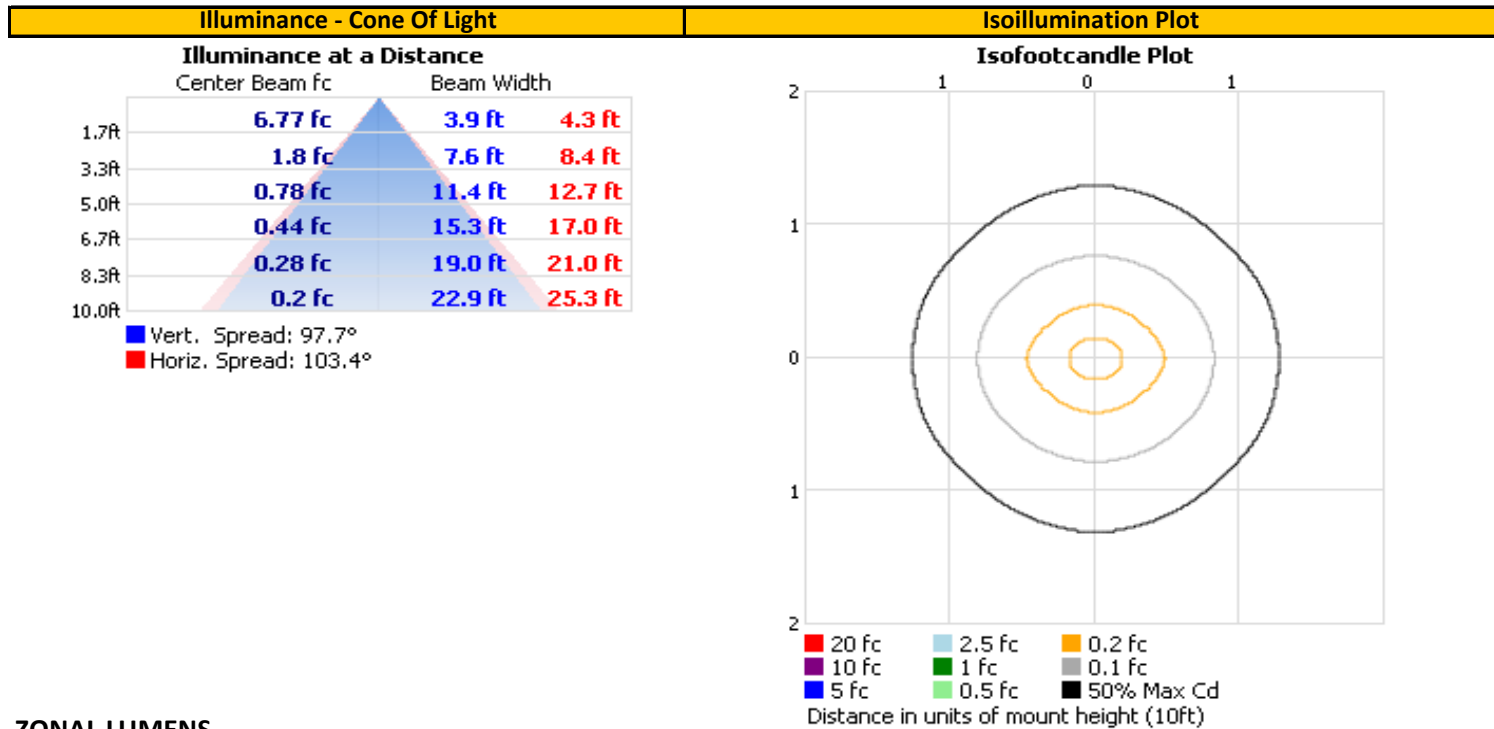

ZONAL LUMENS

Zonal Lumen Summary					
Zone (°)	Lumens	Luminaire	Zone (°)	Lumens	Total
0-30	20.5	20.6%	0-10	1.9	1.9%
0-40	34.4	34.5%	10-20	6.9	6.9%
0-60	58.5	58.8%	20-30	11.7	11.8%
60-90	21.6	21.7%	30-40	13.9	13.9%
70-100	17.3	17.4%	40-50	13.1	13.2%
90-120	11.8	11.8%	50-60	11.0	11.1%
0-90	80.1	80.6%	60-70	8.9	9.0%
90-180	19.3	19.4%	70-80	7.1	7.1%
0-180	99.5	100.0%	80-90	5.6	5.6%
			90-100	4.6	4.6%
			100-110	3.9	3.9%
			110-120	3.3	3.3%
			120-130	2.7	2.7%
			130-140	2.2	2.2%
			140-150	1.5	1.5%
			150-160	0.8	0.8%
			160-170	0.3	0.3%
			170-180	0.0	0.0%

REPORT NO. 106005580CRT-003

UNIFIED GLARE RATING (UGR) SUMMARY

Reflectances					
Ceiling Cavity		70	70	50	50
Walls		50	30	50	30
Floor Cavity		20	20	20	20

Room Size		UGR Viewed Crosswise				
X=2H	Y=2H	12.8	14.1	13.5	14.8	15.5
	3H	14.6	15.8	15.2	16.4	17.2
	4H	15.4	16.5	16.0	17.1	17.9
	6H	16.1	17.1	16.7	17.8	18.6
	8H	16.4	17.4	17.1	18.1	18.9
	12H	16.7	17.7	17.4	18.3	19.2
4H	2H	13.2	14.3	13.9	15.0	15.8
	3H	15.2	16.2	15.9	16.9	17.7
	4H	16.1	17.0	16.8	17.7	18.5
	6H	17.0	17.8	17.7	18.5	19.4
	8H	17.4	18.2	18.1	18.9	19.7
	12H	17.8	18.5	18.6	19.3	20.1
8H	4H	16.4	17.1	17.1	17.9	18.7
	6H	17.5	18.1	18.2	18.8	19.7
	8H	18.0	18.5	18.7	19.3	20.2
	12H	18.6	19.1	19.3	19.8	20.8
12H	4H	16.4	17.1	17.2	17.8	18.7
	6H	17.5	18.1	18.3	18.8	19.8
	8H	18.2	18.6	18.9	19.4	20.3

Room Size		UGR Viewed Endwise				
X=2H	Y=2H	12.4	13.7	13.1	14.4	15.1
	3H	14.0	15.2	14.7	15.9	16.6
	4H	14.7	15.8	15.4	16.5	17.3
	6H	15.4	16.4	16.1	17.1	17.9
	8H	15.7	16.7	16.4	17.4	18.2
	12H	16.0	16.9	16.7	17.6	18.5
4H	2H	12.9	14.0	13.6	14.7	15.5
	3H	14.7	15.7	15.4	16.4	17.2
	4H	15.6	16.5	16.3	17.2	18.0
	6H	16.4	17.2	17.1	17.9	18.8
	8H	16.8	17.5	17.5	18.3	19.1
	12H	17.2	17.8	17.9	18.6	19.5
8H	4H	15.9	16.6	16.6	17.4	18.2
	6H	16.9	17.5	17.7	18.3	19.2
	8H	17.4	18.0	18.2	18.8	19.6
	12H	18.0	18.5	18.7	19.2	20.2
12H	4H	16.0	16.6	16.7	17.4	18.3
	6H	17.0	17.6	17.8	18.3	19.3
	8H	17.6	18.1	18.4	18.9	19.8

Maximum UGR	
20.8	

EQUIPMENT LIST

REPORT NO. 106005580CRT-003

#	Equipment	Model No	Control No.	Last Cal	Cal Due
1	LSI Type C Goniophotometer System	6440	---	4/21/2025	7/20/2025
2	Elgar AC Power Supply	CW1251	---	VBU	VBU
3	Yokogawa Power Analyzer	WT210	E464	6/12/2024	6/12/2025
4	Testo Hygrothermometer	608-H1	L285	5/8/2025	5/8/2026
5	Omega Thermometer	DPi8-C24	M263	3/13/2025	3/13/2026
6	Tape Measure	Crescent	L288	12/9/2024	12/9/2027
The AC power supplies used for testing have a crest factor capable of 0-3.5					

REVISION HISTORY

#	Revision Date	Updated By	Reviewed By	Description of Change
---	None	---	---	---
---	---	---	---	---
---	---	---	---	---